

# Distributed Memory Algorithms

Wolfgang Schreiner

Research Institute for Symbolic Computation (RISC-Linz)  
Johannes Kepler University, A-4040 Linz, Austria

[Wolfgang.Schreiner@risc.uni-linz.ac.at](mailto:Wolfgang.Schreiner@risc.uni-linz.ac.at)

<http://www.risc.uni-linz.ac.at/people/schreine>

## **SIMD Mesh Matrix Multiplication**

Single Instruction, Multiple Data

- $n^2$  processors,
- $3n$  time.

*Algorithm: see slide.*

# SIMD Mesh Matrix Multiplication

## 1. Precondition array

- Shift row  $i$  by  $i - 1$  elements west,
- Shift column  $j$  by  $j - 1$  elements north.

## 2. Multiply and add

On processor  $\langle i, j \rangle$ :

$$c = \sum_k a_{ik} * b_{kj}$$

- Inverted dimensions

- Matrix  $\downarrow i, \rightarrow j$ .
- Processor array  $\downarrow iyproc, \rightarrow ixproc$ .


- $n$  shift and  $n$  arithmetic operations.

- $n^2$  processors.

*Maspar program: see slide.*


# SIMD Cube Matrix Multiplication

Cube of  $d^3$  processors

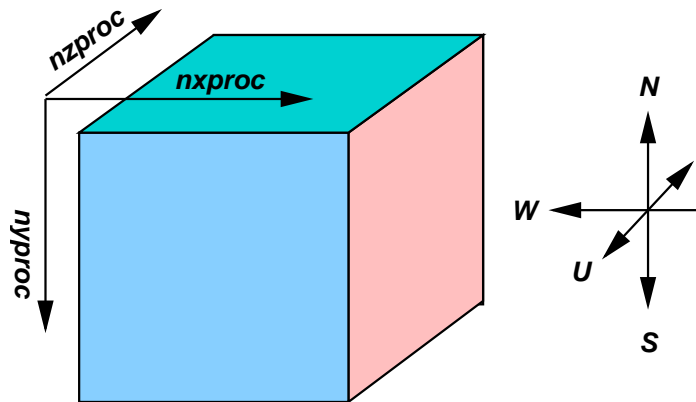

Idea

- Map  $A(i, j)$  to all  $P(j, i, k)$
- Map  $B(i, j)$  to all  $P(i, k, j)$

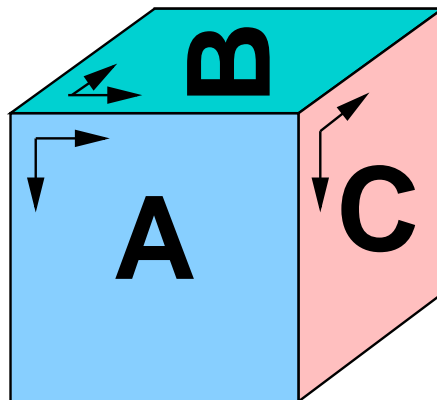

## SIMD Cube Matrix Multiplication


### Multiplication and Addition

- Each processor computes single product

$$P_{ijk} : c_{ijk} = a_{ik} * b_{kj}$$

- Bars along x-directions are added

$$P_{0ij} : C_{ij} = \sum_k c_{ijk}$$

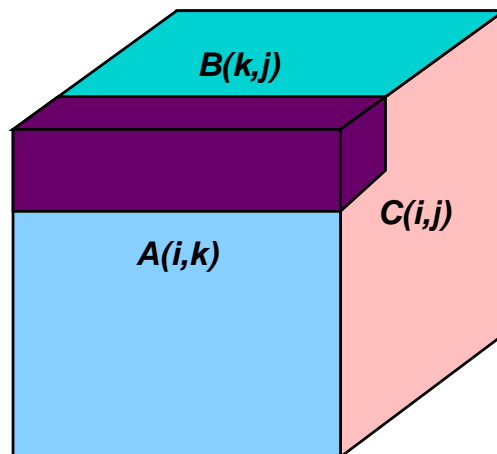

# SIMD Cube Matrix Multiplication

## Maspar Program

```
int A[N,N], B[N,N], C[N,N];
plural int a, b, c;

a = A[iyproc, ixproc];
b = B[ixproc, izproc];
c = a*b;

for (i = 0; i < N-1; i++)
  if (ixproc > 0)
    c = xnetE[1].c
  else
    c += xnetE[1].c;

if (ixproc == 0) C[iyproc, izproc] = c;
```

- $O(n^3)$  processors,
- $O(n)$  time.

## SIMD Cube Matrix Multiplication

### Tree-like summation

```
plural x, d;
```

```
...
```

```
x = ixproc;
```

```
d = 1;
```

```
while (d < N) {
```

```
    if (x % 2 != 0) break;
```

```
    c += xnetE[d].c;
```

```
    x /= 2;
```

```
    d *= 2;
```



```
}
```

```
if (ixproc == 0) C[iyproc, izproc] = c;
```

- $O(\log n)$  time
- $O(n^3)$  processors

*Long-distance communication required!*

## SIMD Hypercube Mat. Multiplication

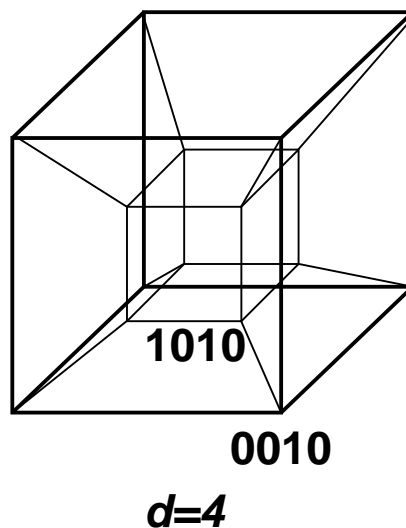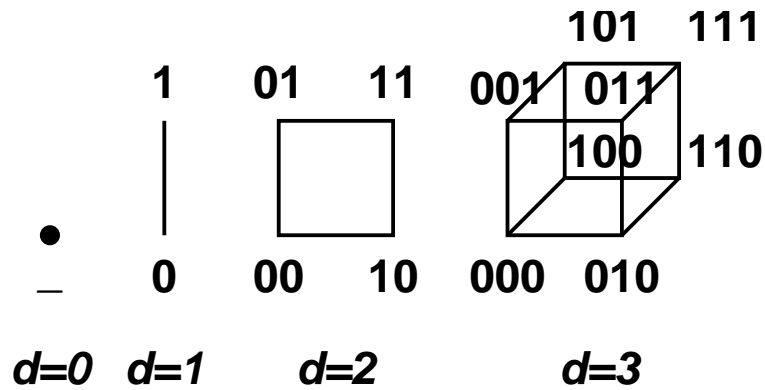

- $d$ -dimensional hypercube  $\Rightarrow$  processors indexed with  $d$  bits.
- $p_1$  and  $p_2$  differ in  $i$  bits  $\Rightarrow$  shortest path between  $p_1$  and  $p_2$  has length  $i$ .



## SIMD Hypercube Matrix Multiplication

Mapping of cube with dimension  $n$  to hypercube with dimension  $d$ .

- Hypercube of  $n^3 = 2^d$  processors  $\Rightarrow d = 3s$  (for some  $s$ ).
- 64 processors  $\Rightarrow n = 4, d = 6, s = 2$ .

|           |                      |                      |                      |
|-----------|----------------------|----------------------|----------------------|
| Hypercube | $\underline{d_5d_4}$ | $\underline{d_3d_2}$ | $\underline{d_1d_0}$ |
| Cube      | $x$                  | $y$                  | $z$                  |

- Embedding algorithm
  - Cube indices in binary form ( $s$  bits each)
  - Concatenate indices ( $3s = d$  bits)
- Neighbor processors in cube remain neighbors in hypercube.
- Any cube algorithm can be executed with same efficiency on hypercube.

## SIMD Hypercube Matrix Multiplication


Tree summation in hypercube.

|            |       |       |       |       |       |       |       |       |
|------------|-------|-------|-------|-------|-------|-------|-------|-------|
| Processors | 000   | 001   | 010   | 011   | 100   | 101   | 110   | 111   |
| Step 1     | $r_0$ | $s_0$ | $r_1$ | $s_1$ | $r_2$ | $s_2$ | $r_3$ | $s_3$ |
| Step 2     | $r_0$ |       | $s_0$ |       | $r_1$ |       | $s_1$ |       |
| Step 3     | $r_0$ |       |       |       | $s_0$ |       |       |       |

- Each processor receives value from neighboring processors only.
- Only short-distance communication is required.

*Cube algorithm can be more efficient on hypercube!*

## Row/Column-Oriented Matrix Multiplication

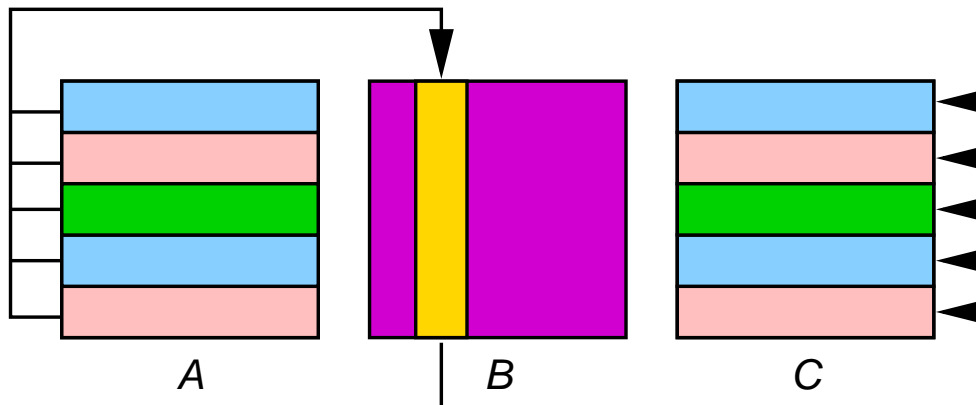

1. Load  $A_i$  on every processor  $P_i$ .
2. For all  $P_i$  do:
  - for  $j=0$  to  $N-1$
  - Receive  $B_j$  from root
  - $C_{ij} = A_i * B_j$
3. Collect  $C_i$

*Broadcasting of each  $B_j \Rightarrow$  Step 2 takes  $O(N \log N)$  time.*

## Ring Algorithm

See Quinn, Figure 7-15.

- Change order of multiplication by
- Using a *ring* of processors.

1. Load  $A_i$  and  $B_i$  on every processor  $P_i$ .

2. For all  $P_i$  do:

$$p = (i+1) \bmod N$$

$$j = i$$

for  $k=0$  to  $N-1$  do

$$C_{ij} = A_i * B_j$$

$$j = (j+1) \bmod N$$

Receive  $B_j$  from  $P_p$

3. Collect  $C_i$

*Point-to-point communication*  $\Rightarrow$  *Step 2 takes  $O(N)$  time.*

## Hypercube Algorithm

Problem: How to embed ring into hypercube?

- Simple solution  $H(i) = i$ :
  - Ring processor  $i$  is mapped to hypercube processor  $H(i)$ .
  - Massive non-neighbor communication!
- How to preserve neighbor-to-neighbor communication? (see Quinn, Figure 5-13)
- Requirements for  $H(i)$ :
  - $H$  must be a 1-to-1 mapping.
  - $H(i)$  and  $H(i + 1)$  must differ in 1 bit.
  - $H(0)$  and  $H(N - 1)$  must differ in 1 bit.

*Can we construct such a function  $H$ ?*

## Ring Successor

Assume  $H$  is given.

- Given: hypercube processor number  $i$
- Wanted: “ring successor”  $S(i)$

$$S(i) = \begin{cases} 0, & \text{if } i = N - 1 \\ H(H^{-1}(i) + 1), & \text{otherwise} \end{cases}$$

*Same technique for embedding a 2-D mesh into an hypercube (see Quinn, Figure 5-14).*

## Gray Codes

Recursive construction.

- 1-bit Gray code  $G_1$

| $i$ | $G_1(i)$ |
|-----|----------|
| 0   | 0        |
| 1   | 1        |

- $n$ -bit Gray code  $G_n$

| $i$             | $G_n(i)$                  | $i$           | $G_n(i)$                  |
|-----------------|---------------------------|---------------|---------------------------|
| 0               | $0G_{n-1}(0)$             | $n-1$         | $1G_{n-1}(0)$             |
| 1               | $0G_{n-1}(1)$             | $n-2$         | $1G_{n-1}(1)$             |
| ...             | ...                       | ...           | ...                       |
| $\frac{n}{2}-1$ | $0G_{n-1}(\frac{n}{2}-1)$ | $\frac{n}{2}$ | $1G_{n-1}(\frac{n}{2}-1)$ |

- Required properties preserved by construction!

$$H(i) = G(i) = i \text{ xor } \frac{i}{2}.$$

## Gray Code Computation

C functions.

- Gray-Code

```
int G(int i)
{
    return(i ^ (i/2));
}
```

- Inverse Gray-Code

```
int G_inv(int i)
{
    int answer, mask;
    answer = i;
    mask = answer/2;
    while (mask > 0)
    {
        answer = answer ^ mask;
        mask = mask / 2;
    }
    return(answer);
}
```



## Block-Oriented Algorithm

$$A = \begin{pmatrix} A_{11} & A_{12} \\ A_{21} & A_{22} \end{pmatrix} B = \begin{pmatrix} B_{11} & B_{12} \\ B_{21} & B_{22} \end{pmatrix}$$

$$C = \begin{pmatrix} C_{11} & C_{12} \\ C_{21} & C_{22} \end{pmatrix} =$$

$$\begin{pmatrix} A_{11}B_{11} + A_{12}B_{21} & A_{11}B_{12} + A_{12}B_{22} \\ A_{21}B_{11} + A_{22}B_{21} & A_{21}B_{12} + A_{22}B_{22} \end{pmatrix}$$

- Use block-oriented distribution introduced for shared memory multiprocessors.

Block-matrix multiplication is analogous to scalar matrix multiplication.

- Use staggering technique introduced for 2D SIMD mesh.

Rotation along rows and columns.

- Perform the SIMD matrix multiplication algorithm on whole *submatrices*.

Submatrices are multiplied and shifted.

## Analysis of Algorithm

$n^2$  matrix,  $p$  processors.

- Row/Column-oriented

- Computation:  $n^2/p * n/p = n^3/p^2$ .
- Communication:  $2(\lambda + \beta n^2/p)$
- $p$  iterations.

- Block-oriented (staggering ignored)

- Computation:  $(n/\sqrt{p})^3 = n^3/(p\sqrt{p})$ .
- Communication:  $4(\lambda + \beta n^2/p)$
- $\sqrt{p} - 1$  iterations.

- Comparison

$$2p(\lambda + \beta n^2/p) > 4(\sqrt{p} - 1)(\lambda + \beta n^2/p)$$

$$2\lambda p + 2\beta n^2 > 4\lambda(\sqrt{p} - 1) + 4\beta(\sqrt{p} - 1)n^2/p$$

$$1. \quad p > 2(\sqrt{p} - 1)$$

$$2. \quad 1 > 2(\sqrt{p} - 1)/p$$

True for all  $p \geq 1$ .

*Also including staggering, for larger  $p$  the block-oriented algorithm performs better!*