

# Debian/GNU Linux Networking

## Basics of the Networking

Károly Erdei

November 24, 2011



# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs

# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs

# Range of Computer Networks

## Ranges

- PAN - Personal Area Networks 1-10 m, (using Bluetooth units)
- LAN - Local Area Network: Room (10 m), building (100 m), campus (1000 m)
- MAN - Metropolitan Area Network: City (10 km) Metronet-Hgb
- WAN - Wide Area Network: Country (100 km), continent (1000 km)
- Internetwork - Combination or network of networks: Planet (10K km)

## LAN

- Private network within building or complex of buildings
- Connection based on cables (hosts are attached via network cards)
- Transmission speed 0.1–10 Gbps
- Various topologies: Bus-based (Ethernet), Wireless (WLAN)

# Network of Networks

## Internet

### Internetwork:

- Connects multiple WANs/LANs across the globe
- LANs/WANs connected to Internetworks by **routers** or **gateways**
- Each attached network may have different **protocol**
  - Protocol = language spoken by computers on network
- Any computer in any network can communicate with any other computer in any other network independently of physical network technologies
  - Communication based on higher level protocols

### The Internet

- A worldwide internetwork that uses the **TCP/IP** protocol suite
- It is a packet switching network (data will be splitted in packets)

# The Internet

## Various groups of networks

- Backbones: large networks for connecting other networks (GEANT2)
- Regional networks: e.g. connecting universities (ACOnet)
- Commercial networks: privately owned for paying users (LIWEST)

## Lot of services

- Application level: World Wide Web, eMail, file transfer, remote login
- Network level: connectionless packet delivery (UDP), reliable stream transport (TCP)


## Today the Internet is a collection of commercial networks

# Organisation of the Internet

## Internet Architecture Board (IAB)


- Internet Engineering Task Force (IETF)
  - Decisions about protocols, procedures, conventions
- Request for Comments (RFCs) - <http://www.ietf.org/rfc>
  - Series of reports that defines the (history of) Internet protocols
- Internet Standards
  - Defines the official Internet protocols
  - References the RFCs that define a current standard
  - Update of standards: other RFCs will be referenced
- Examples of Internet Standards:
  - IP - Internet Protocol: STD 5
  - TCP - Transmission Control Protocol: STD 7
  - DNS - Domain Name System: STD 13
  - SMTP - Simple Mail Transfer Protocol: STD 10

# GEANT2 - Pan-European Education/Research Network

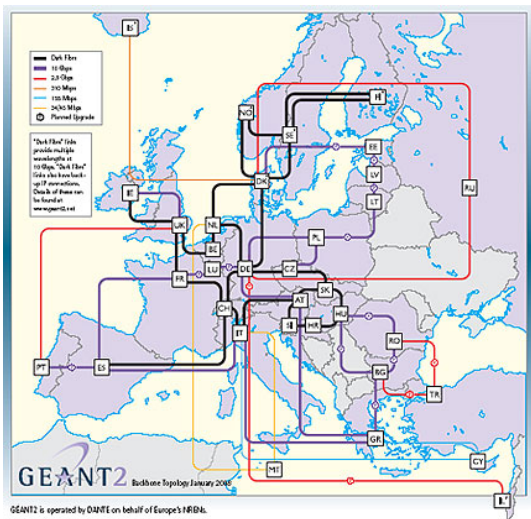



# ACOnet - Austrian Academic Computer Network

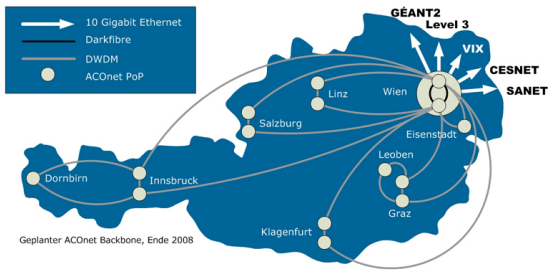

# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs

# Ethernet

## MAC addresses

### MAC / physical / hardware Address

- each Ethernet station is given a single 48-bit unique MAC address
- is used both to specify the destination and the source of each data packet
- is six groups of two hexadecimal digits, separated by - or :
  - first three octets identify the organization
  - arbitrary but unique next three octets assigned by the organisation
- is used/valid only in LAN (network segment)

### technologies which use MAC address


- Ethernet, 802.11 wireless networks, Bluetooth

### Special MAC addresses:

- broadcast address: ff:ff:ff:ff:ff:ff
  - packets sent to this address are received by all stations on the local network

# Ethernet

## The frame structure

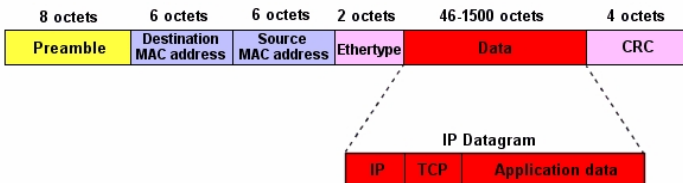

# Ethernet - MAC address

How to find a local MAC addresses

## Linux - command line with `/sbin/ifconfig`

```

uhu:~> /sbin/ifconfig eth0
eth0      Link encap:Ethernet  HWaddr 00:16:41:16:6D:5D
          inet addr:192.168.1.115  Bcast:192.168.1.255  Mask:255.255.255
          ....
uhu:~> /sbin/ifconfig eth1
eth1      Link encap:Ethernet  HWaddr 00:16:6F:BA:3E:01
          UP BROADCAST MULTICAST  MTU:1500  Metric:1
          ....

```

## MS Windows - fastest way

- in DOS Window by means of `ipconfig /all`

## Linux - all units in the network segment

- `arp -a` (only one line listed as example):
  - `crutch.risc.uni-linz.ac.at (193.170.37.76) at 00:16:35:37:5C:EC [ether] on eth0`

# Ethernet - MAC address

How to find a local MAC addresses - Linux with gnome-nettool

The screenshot shows the 'Network Tools - Devices' window in a Linux environment. The 'Devices' tab is selected, and the 'Ethernet Interface (eth0)' is chosen. The 'IP Information' section displays a table with the following data:

Protocol	IP Address	Netmask / Prefix	Broadcast	Scope
IPv4	193.170.37.80	255.255.255.0	193.170.37.255	
IPv6	fe80::213:20ff:fe75:4402 64			Link

Below the IP information, there are two sections: 'Interface Information' and 'Interface Statistics'.

**Interface Information**

- Hardware address: 00:13:20:75:44:02
- Multicast: Enabled
- MTU: 1500
- Link speed: not available
- State: Active

**Interface Statistics**

- Transmitted bytes: 1.5 GiB
- Transmitted packets: 2187400
- Transmission errors: 0
- Received bytes: 893.2 MiB
- Received packets: 2569788
- Reception errors: 0
- Collisions: 0

# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols**
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs

# Internet Protocols

## Connectionless and Connection-oriented protocols

### Connectionless protocol

- communication between two network point in which message can be sent without prior arrangement
- the transmitting device sending the message:
  - simply sends the message to the recipient address
- often problems with transmission
- examples: IP, UDP, ICMP, IPX

### Connection-oriented protocol

- delivers a stream of data in the same order as it was sent
  - first a communication section will be established
  - data stream will be send by handshaking
  - packet retransmission by error, data lost, etc.
- examples: TCP
  - phone call: user must dial first and get answer before transmitting data



# IP - The Internet Protocol

## Features of IP

- A standard protocol (STD 5)
- No delivery guarantees
  - **Connection-less**
  - **Unreliable**: packets may be lost, duplicated, reordered
  - packets oriented
- Data from an upper layer protocol is encapsulated inside one or more packets

## Core functionality

- defines IP addresses und subnetting
- defines routing in the network

# IP Addressing


## RFC 1166: Internet Numbers

- An IP address is a 32 bit unsigned integer
  - There exist  $2^{32} \approx 4$  billion IP addresses
- Representation in dotted decimal notation
  - X.X.X.X; Each X is a decimal number, a byte of the address
- Example: 128.10.2.30: 10000000 00001010 00000010 00111110

## Some addresses are reserved for special purposes

- **net.0**: the “network” address (not a particular host) 193.170.37.0
- **default gateway**: an address in this network: 193.170.37.1
- **broadcast address**: **net.255**
- 0.0.0.0: “this” host
- 127.0.0.1: **loopback** (not sent across network, for testing local IP setup)

# IP Datagram Structure

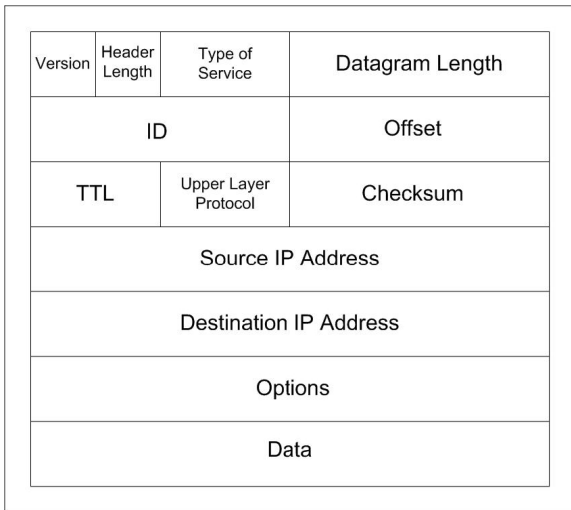

# Routers and Gateways

## Features

### Router: a networking device


- a computer whose software and hardware are usually tailored to the tasks of routing and forwarding packets
- transfers packets only across networks using similar protocols
- contains a specialized operating system (e.g. Cisco's IOS)
- has multiple network connections
- Types of routers
  - small units (DSL router) - ISPs big multiprocessor unit

### Gateway

- a networking device that converts protocols among networks
- accepts a packet formatted for one protocol (AppleTalk) and converts it to a packet formatted to another protocol (TCP/IP)
- Default gateway

# Routers, packets

A route of a packet in the Internet

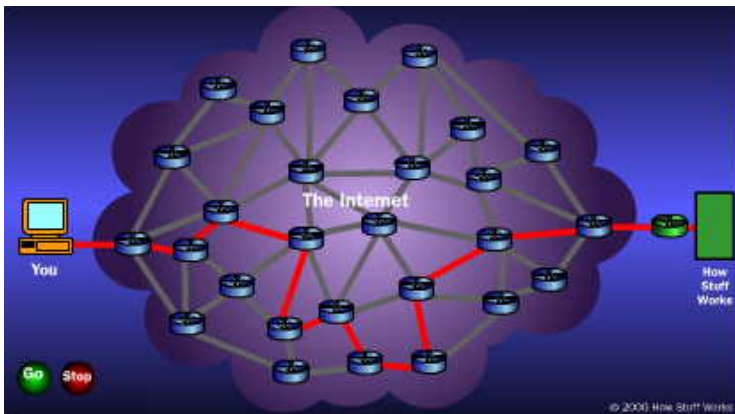

# Private Networks - Private IP Addresses

The addresses, which can be used by **everyone**

## Private Internet Addresses

- RFC 1918: address allocation for private Internets
  - May be used **internally** in any organization
  - routers have to discard any packets with a private IP address in the IP header
  - gives security for private networks they are not available from the Internet

## Examples

- private class A network: 10.0.0.0 - 10.255.255.255
  - Huge address range for communication within an organization
- Home network: 192.168.0.0 - 192.168.255.255
  - Cable/DSL router: 192.168.1.1

# Internet Protocol - ICMP based applications

## Ping and Traceroute

### ping

- simplest version: **ping hostname**

```
PING kernel.risc.uni-linz.ac.at (193.170.37.225) 56(84) bytes of data:
64 bytes from kernel.risc.uni-linz.ac.at (193.170.37.225):
icmp_seq=1 ttl=245 time=25.0 ms
64 bytes from kernel.risc.uni-linz.ac.at (193.170.37.225):
icmp_seq=2 ttl=245 time=26.3 ms
--- kernel.risc.uni-linz.ac.at ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 999ms
rtt min/avg/max/mdev = 25.021/25.705/26.389/0.684 ms
```

### traceroute

- simplest version: **traceroute hostname**
- try it yourself this command

# Internet Protocol - ICMP based applications

## Traceroute

```
hades
File Edit View Terminal Tabs Help
hades:sysadmin!3>
hades:sysadmin!3>
hades:sysadmin!3> traceroute www.bme.hu
traceroute to www.bme.hu (152.66.115.35), 30 hops max, 40 byte packets
 1 net37-gtw (193.170.37.1)  0.479 ms  2.601 ms  0.439 ms
 2 jkuc3hbl.edvz.uni-linz.ac.at (140.78.222.1)  0.480 ms  0.474 ms  0.490 ms
 3 jkuc6bbl.edvz.uni-linz.ac.at (140.78.200.140)  0.594 ms  0.568 ms  0.576 ms
 4 Linz.ACO.net (193.171.22.25)  0.816 ms  0.738 ms  0.599 ms
 5 linz2.aco.net (193.171.15.10)  1.076 ms  0.991 ms  0.980 ms
 6 wien21.aco.net (193.171.15.5)  4.465 ms  4.418 ms  4.432 ms
 7 aconet.rtl.vie.at.geant2.net (62.40.124.1)  8.908 ms  4.411 ms  4.444 ms
 8 so-3-0-0.rtl.bud.hu.geant2.net (62.40.112.14)  9.237 ms  9.201 ms  9.181 ms
 9 hungarnet-gw.rtl.bud.hu.geant2.net (62.40.124.102)  9.445 ms  9.331 ms  9.347 ms
10 c6513-tengbeth13-3.vh.hbone.hu (195.111.97.242)  181.798 ms  219.094 ms  9.366 ms
11 sup720-tengbeth2-1.bme.hbone.hu (195.111.97.102)  9.434 ms  9.405 ms  9.403 ms
12 tge8-1.taz.bme.hu (152.66.0.125)  9.438 ms  9.381 ms  9.419 ms
13 torpapa.eik.bme.hu (152.66.115.35)  9.319 ms  9.303 ms  9.294 ms
hades:sysadmin!4> █
```



# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs

# TCP - Transmission Control Protocol

## Transport layer services

- Connection oriented
  - for data delivery first a connection must be established
- Same Order Delivery
  - data will arrive in the same order it has been sent
- Reliable data transmission
  - retransmit corrupted packages; error detection code, packet acknowledgement
- Byte orientation: not packages, but **stream** of byte sent
- Introducing the term **port**
  - port addresses multiple entities on the same location

# TCP - Ports

## The problem of the applications on a host to communicate

- more programs run on a computer
  - sendmail, webserver, name server, ftp-, pop server, etc.
- the computer has one unique IP address
- how to deal with the application, how to differ them
- introducing **ports** is the solution
  - analogy: postal address as IP address; appartement number or name is the port number

## Ports

- to each services in the Internet/Computer a port is assigned
  - ports are identified by the port number
  - see in Linux the `/etc/services` file for numbers/services allocation
  - port number is a part of TCP packets header
- a program implement a service
  - the program **LISTEN** on the port for a communication

## TCP - Ports

Unix port in /etc/services

```

ftp-data      20/tcp
ftp           21/tcp
ssh           22/tcp          # SSH Remote Login Prot
telnet        23/tcp
smtp          25/tcp          mail
whois         43/tcp          nicname
domain        53/tcp          # name-domain server
domain        53/udp
finger        79/tcp
www           80/tcp          http
www           80/udp          # WorldWideWeb HTTP
              # HyperText Transfer Pr
pop3          110/tcp         pop-3          # POP version 3
imap2         143/tcp         imap           # Interim Mail Access P
https         443/tcp         # http protocol over TL
https         443/udp
ftps          990/tcp
telnets      992/tcp         # Telnet over SSL
imaps         993/tcp         # IMAP over SSL
pop3s         995/tcp         # POP-3 over SSL

```

# TCP - Transmission Control Protocol

Example: Sending email per smtp port (1)

```
hu:~> telnet bullfinch 25
Trying 193.170.37.222...
Connected to bullfinch.risc.uni-linz.ac.at.
Escape character is '^]'.
220 bullfinch.risc.uni-linz.ac.at ESMTP Sendmail 8.13.8/8.13.8/Debian-3
Mon, 3 Nov 2008 15:19:26 +0100; (No UCE/UBE) logging access from: i
uhu37.risc.uni-linz.ac.at(OK)-ke@uhu37.risc.uni-linz.ac.at [193.170.37.
helo ich-bin-s
250 bullfinch.risc.uni-linz.ac.at Hello ke@uhu37.risc.uni-linz.ac.at
[193.170.37.115], pleased to meet you
mail from: k.erdei@risc.uni-linz.ac.at
250 2.1.0 k.erdei@risc.uni-linz.ac.at... Sender ok
rcpt to: karoly.erdei@jku.at
250 2.1.5 karoly.erdei@jku.at... Recipient ok
```

# TCP - Transmission Control Protocol

Example: Sending email per smtp port (2)

```
data
354 Enter mail, end with "." on a line by itself
this is an email sent by telnet 25 command from the laptop to the mail
server bullfinch.risc... demonstrating how smtp works
.
250 2.0.0 mA3EJQr4014077 Message accepted for delivery
quit
221 2.0.0 bullfinch.risc.uni-linz.ac.at closing connection
Connection closed by foreign host.
uhu:~>
```

# TCP - Transmission Control Protocol

Example: Downloading file from the WWW server


## Telnet to port 80 on the Web server

```
hades:www!11> telnet www 80
Trying 193.170.37.138...
Connected to crow.risc.uni-linz.ac.at.
Escape character is '^]'.
GET http://www/proba.txt
```

```
Hello! This is a test file. To get it per port access with telnet.
It succeeded to get this file per port access from the web server.
Great!
```

```
Connection closed by foreign host.
hades:www!12>
```

# TCP Datagram Structure

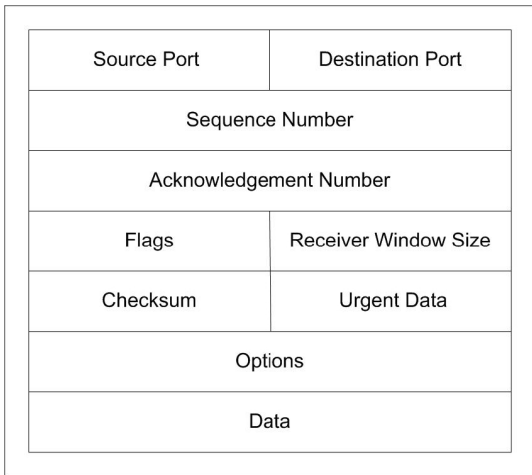



# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP**
- 6 Check Network
- 7 Connecting PCs

# DHCP - Dynamic Host Control Protocol

Client - Server application

## DHCP Client - Server communication flow

- DHCP is used to obtain parameters necessary for IP networking
- **client**: broadcasts a DHCPDISCOVER request
  - Asks for a DHCP server on the network segment
  - Asks for a lease and for an IP address
  - Lease: the length of time for the allocation is valid
- **server**: sends a DHCPOFFER message
  - Checks if the MAC of client is registered
  - Marks an IP from the spool
- **client**: broadcasts a DHCPREQUEST on the network
  - The IP of the server is in the packet
- **server**: sends the client the data
  - Reservers the IP for the time of the lease
  - Other servers delete the mark for the IP

# DHCP - Dynamic Host Control Protocol

## DHCP server

- has a pool of IP addresses
- manages other network parameters for networking by client
  - options are widely configurable
- checks the MAC of the client, if configured
- lease time is configurable (max;min)

## Client requests periodically

- Client has to request again before lease time is over
  - a new IP or request the same IP
- By booting must suspend other processes
  - without IP no network connection

DHCP server is implemented in Home/DSL/Cable routers

# DHCP - Dynamic Host Control Protocol

## DHCP Server data table

### Assigned data by DHCP server at RISC

- Network configurations parameter at RISC
  - IP Address
  - Lease
  - Domain Name (risc.uni-linz.ac.at)
  - Default Gateway address (193.170.38.1)
  - Name server IP address (193.170.37.225)
  - Name server IP address (193.170.37.224)
  - WINS servers (phoebe.risc.uni-linz.ac.at)
  - WINS servers (samba-dc1.risc.uni-linz.ac.at)
  - NTP servers (time.risc.uni-linz.ac.at)
  - SMTP server (mail.risc.uni-linz.ac.at)
  - POP server (pop.risc.uni-linz.ac.at)

# NAT - Network Address Translation

## How NAT works

- general definition
  - a technique that hides an entire address space, usually consisting of private network addresses (RFC 1918), behind a single IP address in another, (often) public address space.
- implemented in a router - connected to private/public network
  - uses translation tables to map/remap the addresses
  - translation table are created by the outgoing requests
  - rewrites the outgoing IP packets as sent from the router
  - Assigns to each connection a different source **port**
- NAT introduces complications in communication, performance
  - it has to rewrite checksum, reassemble packets, fragment them again, etc.
- The NAT box - the Internet router
  - Cable/DSL router: a firewall is always integrated

# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network**
- 7 Connecting PCs



# Checking Network Connections

gnome-nettool, devices

Network Tools - Devices <@prometheus>

Tool Edit Help

Devices | Ping | Netstat | Traceroute | Port Scan | Lookup | Finger | Whois

Network device:  Ethernet Interface (eth0)  Configure

**IP Information**

Protocol	IP Address	Netmask / Prefix	Broadcast	Scope
IPv4	193.170.37.80	255.255.255.0	193.170.37.255	
IPv6	fe80::213:20ff:fe75:4402 64			Link

**Interface Information**

Hardware address: 00:13:20:75:44:02

Multicast: Enabled

MTU: 1500

Link speed: not available

State: Active

**Interface Statistics**

Transmitted bytes: 1.5 GiB

Transmitted packets: 2187400

Transmission errors: 0

Received bytes: 893.2 MiB

Received packets: 2569788

Reception errors: 0

Collisions: 0

# Checking Network Connections

gnome-nettool, ping, LAN

The screenshot shows the 'Network Tools - Ping' application window. The title bar indicates the user is '@prometheus'. The interface includes a menu bar (Tool, Edit, Help) and a toolbar with various network tools: Devices, Ping (selected), Netstat, Traceroute, Port Scan, Lookup, Finger, and Whois. The 'Network address' field contains 'compute'. The 'Send' section is set to 'Only 5 requests'. A 'Ping' button is visible on the right. Below this is a table showing the results of five ping requests.

Bytes	Source	Seq	Time	Units
64	193.170.37.220	1	4.01	ms
64	193.170.37.220	2	0.288	ms
64	193.170.37.220	3	0.210	ms
64	193.170.37.220	4	0.391	ms
64	193.170.37.220	5	0.307	ms

Below the table, there are two sections of statistics:

- Round Trip Time Statistics:**
  - Minimum: 0.21 ms
  - Average: 1.54 ms
  - Maximum: 4.01 ms
- Transmission Statistics:**
  - Packets transmitted: 5
  - Packets received: 5
  - Packets loss: 0%



# Checking Network Connections

gnome-nettool, ping, remote

The screenshot shows the 'Network Tools - Ping' window. The 'Network address' field contains 'www.univie.ac.at'. The 'Send' options are set to 'Only 5 requests'. A 'Ping' button is visible. Below the input fields is a table showing the results of the ping test.

Bytes	Source	Seq	Time	Units
64	131.130.1.78	1	4.16 ms	
64	131.130.1.78	2	4.13 ms	
64	131.130.1.78	3	4.18 ms	
64	131.130.1.78	4	4.12 ms	
64	131.130.1.78	5	4.09 ms	

Below the table, there are two sections of statistics:

- Round Trip Time Statistics**
  - Minimum: 4.09 ms
  - Average: 4.14 ms
  - Maximum: 4.18 ms
- Transmission Statistics**
  - Packets transmitted: 5
  - Packets received: 5
  - Packets loss: 0%

# Checking Network Connections

gnome-nettool, traceroute

The screenshot shows a window titled "Network Tools - Traceroute <@prometheus>". The window has a menu bar with "Tool", "Edit", and "Help". Below the menu bar are several tabs: "Devices", "Ping", "Netstat", "Traceroute", "Port Scan", "Lookup", "Finger", and "Whois". The "Traceroute" tab is selected. A text input field labeled "Network address:" contains "www.bme.hu". To the right of the input field is a "Trace" button with a green arrow icon. Below the input field is a table showing the results of the traceroute.

Hop	Hostname	IP	Time 1	Time 2
1	net37-gtw	193.170.37.1	0.453	0.429
2	jkuc3hb1.edvz.uni-linz.ac.at	140.78.222.1	0.498	0.503
3	jkuc6bb1.edvz.uni-linz.ac.at	140.78.200.140	0.632	0.575
4	Linz.ACO.net	193.171.22.25	0.586	0.575
5	linz2.aco.net	193.171.15.10	1.064	1.005
6	wien21.aco.net	193.171.15.5	4.477	4.430
7	aconet.rt1.vie.at.geant2.net	62.40.124.1	4.446	5.584
8	so-3-0-0.rt1.bud.hu.geant2.net	62.40.112.14	41.474	9.231
9	hungarnet-gw.rt1.bud.hu.geant2.net	62.40.124.102	9.410	9.422
10	c6513-tengbeth13-3.vh.hbone.hu	195.111.97.242	9.468	9.454
11	sup720-tengbeth2-1.bme.hbone.hu	195.111.97.102	9.501	9.439
12	tge8-1.taz.bme.hu	152.66.0.125	9.441	9.417
13	torpapa.eik.bme.hu	152.66.115.35	9.348	9.303

# Network Connections - Routing

gnome-nettool, netstat

The screenshot shows a window titled "Network Tools - Netstat <@prometheus>". The "Netstat" tab is selected. Under "Display:", the "Routing Table Information" radio button is selected. A "Netstat" button with a refresh icon is visible. Below is a table of routing information:

Destination	Gateway	Netmask	Interface
193.170.37.0	0.0.0.0	255.255.255.0	eth0
0.0.0.0	193.170.37.1	0.0.0.0	eth0
fe80::	::	64	eth0
::1	::	128	lo
fe80::213:20ff:fe75:4402	::	128	lo
ff00::	::	8	eth0

# Network Connections - Active Services

gnome-nettool, netstat

Protocol	IP Source	Port/Service	State
tcp	0.0.0.0	512	LISTEN
tcp	127.0.0.1	2208	LISTEN
tcp	0.0.0.0	513	LISTEN
tcp	0.0.0.0	2049	LISTEN
tcp	0.0.0.0	514	LISTEN
tcp	0.0.0.0	548	LISTEN
tcp	0.0.0.0	57253	LISTEN
tcp	0.0.0.0	587	LISTEN
tcp	193.170.37.80	427	LISTEN
tcp	127.0.0.1	427	LISTEN

# Network Connections - Active Services

gnome-nettool, netstat

Network Tools - Netstat <@prometheus>

Tool Edit Help

Devices Ping Netstat Traceroute Port Scan Lookup Finger Whois

Display:  Routing Table Information  
 Active Network Services  
 Multicast Information

Netstat

Protocol	IP Source	Port/Service	State
tcp	0.0.0.0	113	LISTEN
tcp	0.0.0.0	787	LISTEN
tcp	0.0.0.0	21	LISTEN
tcp	0.0.0.0	22	LISTEN
tcp	127.0.0.1	35990	LISTEN
tcp	0.0.0.0	23	LISTEN
tcp	0.0.0.0	631	LISTEN
tcp	0.0.0.0	43032	LISTEN
tcp	0.0.0.0	952	LISTEN
tcp	0.0.0.0	632	LISTEN

# Network Connections - Active Services

gnome-nettool, netstat

Network Tools - Netstat <@prometheus>

Tool Edit Help

Devices Ping Netstat Traceroute Port Scan Lookup Finger Whois


Display:  Routing Table Information  
 Active Network Services  
 Multicast Information

Netstat

Protocol	IP Source	Port/Service	State
udp	0.0.0.0	719	
udp	0.0.0.0	10080	
udp	0.0.0.0	5353	
udp	0.0.0.0	111	
udp	0.0.0.0	631	
udp	0.0.0.0	46841	
udp	193.170.37.80	123	
udp	127.0.0.1	123	
udp	0.0.0.0	123	
udp	0.0.0.0	767	

# Network Connections - nmap

gnome-nettool, local

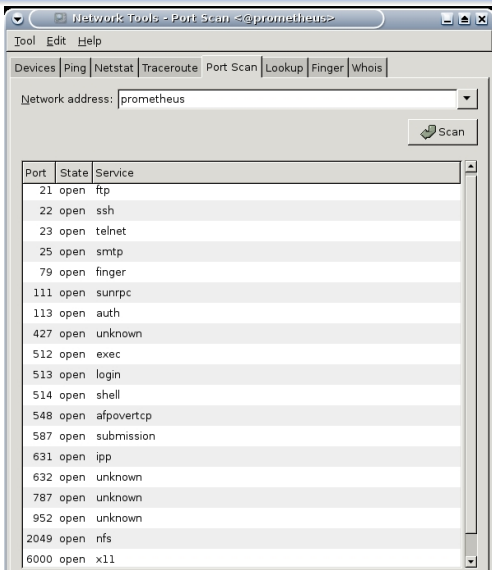

Network Tools - Port Scan <@prometheus>

Tool Edit Help

Devices Ping Netstat Traceroute Port Scan Lookup Finger Whois


Network address: prometheus

Scan

Port	State	Service
21	open	ftp
22	open	ssh
23	open	telnet
25	open	smtp
79	open	finger
111	open	sunrpc
113	open	auth
427	open	unknown
512	open	exec
513	open	login
514	open	shell
548	open	afpovertcp
587	open	submission
631	open	ipp
632	open	unknown
787	open	unknown
952	open	unknown
2049	open	nfs
6000	open	x11

# Network Connections- nmap

gnome-nettool, remote

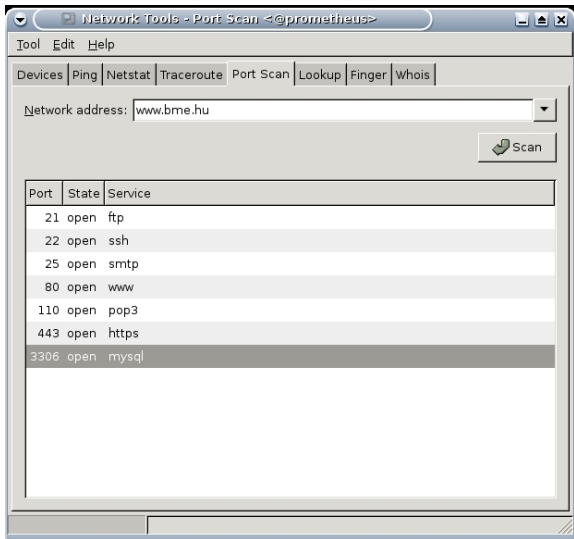

The screenshot shows a window titled "Network Tools - Port Scan <@prometheus>". The window has a menu bar with "Tool", "Edit", and "Help". Below the menu bar are several tabs: "Devices", "Ping", "Netstat", "Traceroute", "Port Scan", "Lookup", "Finger", and "Whois". The "Port Scan" tab is selected. A text field labeled "Network address:" contains "www.bme.hu". To the right of this field is a "Scan" button with a green arrow icon. Below the text field is a table with three columns: "Port", "State", and "Service". The table contains the following data:

Port	State	Service
21	open	ftp
22	open	ssh
25	open	smtp
80	open	www
110	open	pop3
443	open	https
3306	open	mysql



# Agenda

- 1 Networks
- 2 Ethernet
- 3 Internet Protocols
- 4 TCP
- 5 DHCP
- 6 Check Network
- 7 Connecting PCs**

# Connecting Computers to the Network

## General remarks

### Connecting automatically by DHCP

- the most comfortable solution
  - if DHCP server is available for the domain, for the LAN segment
  - if the DHCP server is not restricted to known hosts
  - the hardware address (MAC address) of ethernet/wireless interface needed for access


### Connecting manually with fixed IP address

- this solution always works (local help (IP) needed)
- needs more knowledge about the OS, configuration files, etc.
- the only possibility if no DHCP server available

# Connecting Computers to the Network


## Using DHCP

Linux Configuration with `network-admin` - root access necessary

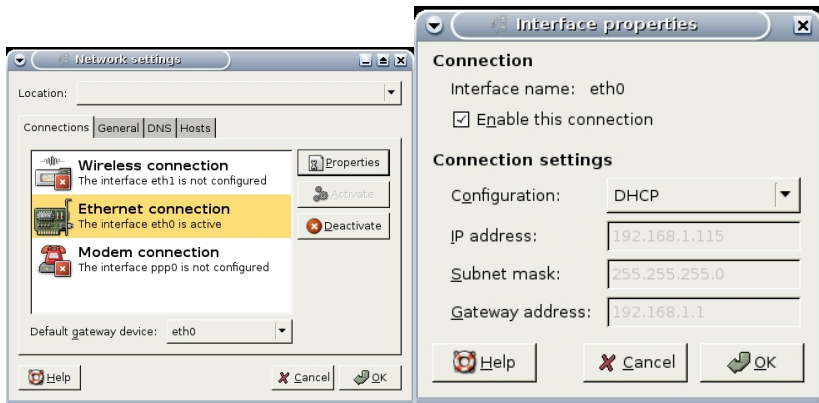

# Connecting Computers to the Network


by DHCP for MS Windows

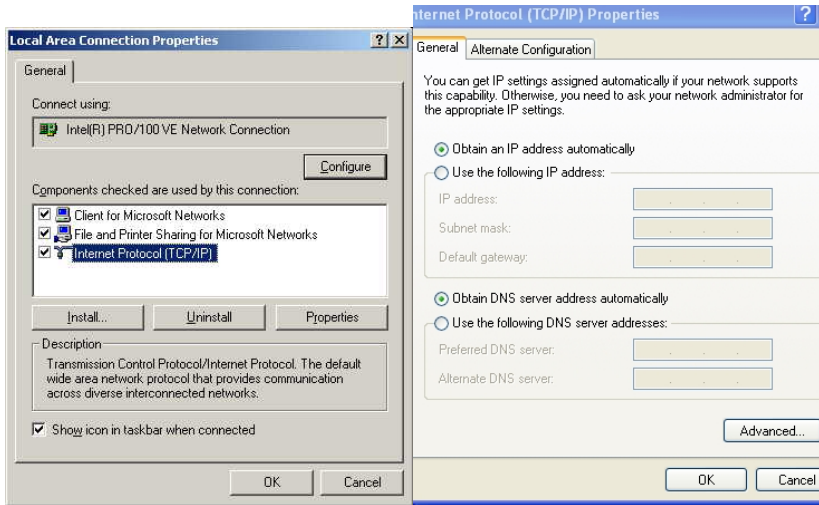

# Connecting Computers to the Network

## Using fixed IP addresses


### Linux Configuration with network-admin

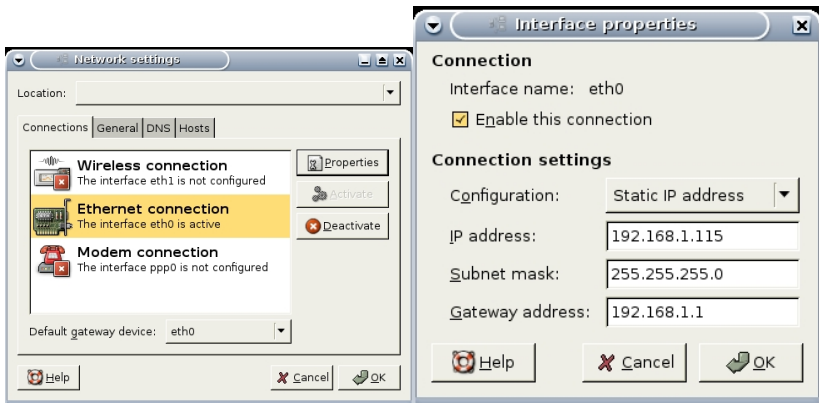

# Connecting Computers to the Network


## The Name Server

### Configuration in Linux with network-admin

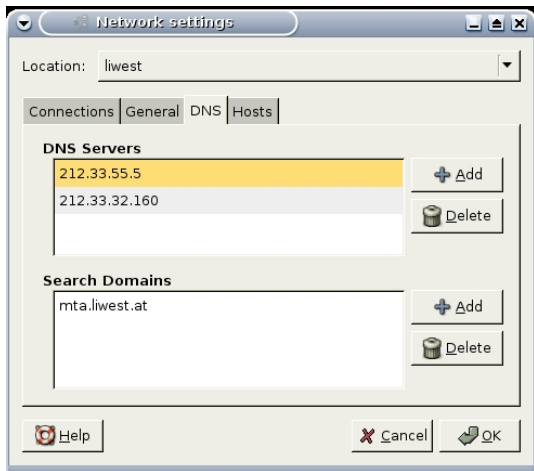

# Connecting Computers to the Network

by static IP for MS Windows

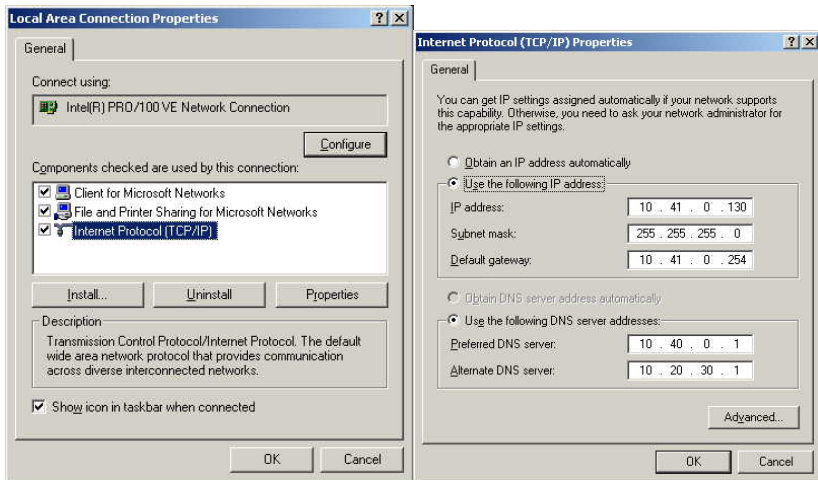

# End of Network Basics

Thanks for your attention !