

Modeling Concurrent Systems


Wolfgang Schreiner


Wolfgang.Schreiner@risc.uni-linz.ac.at

Research Institute for Symbolic Computation (RISC)


Johannes Kepler University, Linz, Austria

<http://www.risc.uni-linz.ac.at>






-
- 1. A Client/Server System**
 - 2. Modeling Concurrent Systems**
 - 3. A Model of the Client/Server System**




A Client/Server System

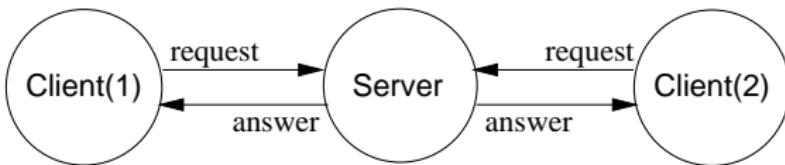


- System of one server and two clients.
 - Three **concurrently** executing system components.
- Server manages a resource.
 - An object that only one system component may use at any time.
- Clients request resource and, having received an answer, use it.
 - Server ensures that not both clients use resource simultaneously.
 - Server eventually answers every request.

Set of system requirements.



System Implementation


```
Server:  
    local given, waiting, sender  
begin  
    given := 0; waiting := 0  
loop  
    sender := receiveRequest()  
    if sender = given then  
        if waiting = 0 then  
            given := 0  
        else  
            given := waiting; waiting := 0  
            sendAnswer(given)  
        endif  
    elseif given = 0 then  
        given := sender  
        sendAnswer(given)  
    else  
        waiting := sender  
    endif  
endloop  
end Server  
  
Client(ident):  
    param ident  
begin  
loop  
    ...  
    sendRequest()  
    receiveAnswer()  
    ... // critical region  
    sendRequest()  
endloop  
end Client
```



Desired System Properties

- Property: **mutual exclusion**.
 - At no time, both clients are in critical region.
 - Critical region: program region after receiving resource from server and before returning resource to server.
 - The system shall only reach states, in which mutual exclusion holds.
- Property: **no starvation**.
 - Always when a client requests the resource, it eventually receives it.
 - Always when the system reaches a state, in which a client has requested a resource, it shall later reach a state, in which the client receives the resource.
- Problem: each system component executes its own program.
 - Multiple program states exist at each moment in time.
 - Total system state is **combination of individual program states**.
 - Not easy to see which system states are possible.


How can we verify that the system has the desired properties?



1. A Client/Server System

2. Modeling Concurrent Systems

3. A Model of the Client/Server System




System States

At each moment in time, a system is in a particular state.

- A **state** $s : \text{Var} \rightarrow \text{Val}$
 - A state s is a mapping of every system variable x to its value $s(x)$.
 - Typical notation: $s = [x = 0, y = 1, \dots] = [0, 1, \dots]$.
 - Var ... the set of system variables
 - Program variables, program counters, ...
 - Val ... the set of variable values.
- The **state space** $\text{State} = \{s \mid s : \text{Var} \rightarrow \text{Val}\}$
 - The state space is the set of possible states.
 - The system variables can be viewed as the coordinates of this space.
 - The state space may (or may not) be finite.
 - If $|\text{Var}| = n$ and $|\text{Val}| = m$, then $|\text{State}| = m^n$.
 - A word of $\log_2 m^n$ bits can represent every state.


A system execution can be described by a path $s_0 \rightarrow s_1 \rightarrow s_2 \rightarrow \dots$ in the state space.



Deterministic Systems

In a sequential system, each state typically determines its successor state.


- The system is **deterministic**.
 - We have a (possibly not total) **transition function** F on states.
 - $s_1 = F(s_0)$ means “ s_1 is the successor of s_0 ”.
- Given an initial state s_0 , the execution is thus determined.
 - $s_0 \rightarrow s_1 = F(s_0) \rightarrow s_2 = F(s_1) \rightarrow \dots$
- A **deterministic system (model)** is a pair $\langle I, F \rangle$.
 - A set of initial states $I \subseteq \text{State}$
 - **Initial state condition** $I(s) : \Leftrightarrow s \in I$
 - A transition function $F : \text{State} \xrightarrow{\text{partial}} \text{State}$.
- A **run** of a deterministic system $\langle I, F \rangle$ is a (finite or infinite) sequence $s_0 \rightarrow s_1 \rightarrow \dots$ of states such that
 - $s_0 \in I$ (respectively $I(s_0)$).
 - $s_{i+1} = F(s_i)$ (for all sequence indices i)
 - If s ends in a state s_n , then F is not defined on s_n .



Nondeterministic Systems

In a concurrent system, each component may change its local state, thus the successor state is not uniquely determined.


- The system is **nondeterministic**.
 - We have a **transition relation** R on states.
 - $R(s_0, s_1)$ means “ s_1 is a (possible) successor of s_0 .
- Given an initial state s_0 , the execution is not uniquely determined.
 - Both $s_0 \rightarrow s_1 \rightarrow \dots$ and $s_0 \rightarrow s'_1 \rightarrow \dots$ are possible.
- A **non-deterministic system (model)** is a pair $\langle I, R \rangle$.
 - A set of initial states (initial state condition) $I \subseteq \text{State}$.
 - A transition relation $R \subseteq \text{State} \times \text{State}$.
- A **run** s of a nondeterministic system $\langle I, R \rangle$ is a (finite or infinite) sequence $s_0 \rightarrow s_1 \rightarrow s_2 \dots$ of states such that
 - $s_0 \in I$ (respectively $I(s_0)$).
 - $R(s_i, s_{i+1})$ (for all sequence indices i).
 - If s ends in a state s_n , then there is no state t such that $R(s_n, t)$.



Derived Notions


- Successor and predecessor:
 - State t is a **(direct) successor** of state s , if $R(s, t)$.
 - State s is then a **predecessor** of t .
 - A finite run $s_0 \rightarrow \dots \rightarrow s_n$ ends in a state which has no successor.
- Reachability:
 - A state t is **reachable**, if there exists some run $s_0 \rightarrow s_1 \rightarrow s_2 \rightarrow \dots$ such that $t = s_i$ (for some i).
 - A state t is **unreachable**, if it is not reachable.

Not all states are reachable (typically most are unreachable).




Reachability Graph

The transitions of a system can be visualized by a graph.

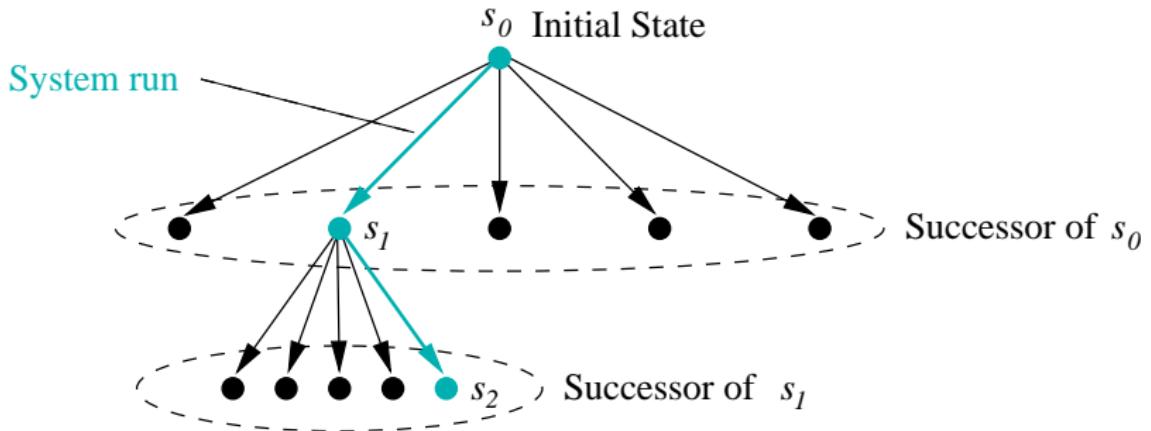

The nodes of the graph are the reachable states of the system.



Examples

6 1. Automata



Fig. 1.1. A model of a watch

of \mathcal{A}_{c3} correspond to the possible counter values. Its transitions reflect the possible actions on the counter. In this example we restrict our operations to increments (inc) and decrements (dec).


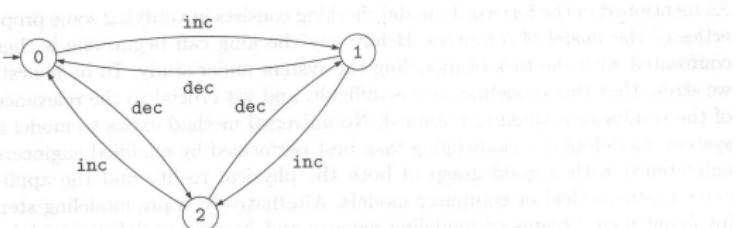


Fig. 1.2. \mathcal{A}_{c3} : a modulo 3 counter

B.Berard et al: "Systems and Software Verification", 2001.




Examples

- A deterministic system $W = (I_W, F_W)$ (“watch”).

- $State := \{\langle h, m \rangle : h \in \mathbb{N}_{24} \wedge m \in \mathbb{N}_{60}\}$.
 - $\mathbb{N}_n := \{i \in \mathbb{N} : i < n\}$.
 - $I_W(h, m) :\Leftrightarrow h = 0 \wedge m = 0$.
 - $I_W := \{\langle h, m \rangle : h = 0 \wedge m = 0\} = \{\langle 0, 0 \rangle\}$.
 - $F_W(h, m) :=$
 - if** $m < 59$ **then** $\langle h, m + 1 \rangle$
 - else if** $h < 24$ **then** $\langle h + 1, 0 \rangle$
 - else** $\langle 0, 0 \rangle$.

- A nondeterministic system $C = (I_C, R_C)$ (modulo 3 “counter”).

- $State := \mathbb{N}_3$.
 - $I_C(i) :\Leftrightarrow i = 0$.
 - $R_C(i, i') :\Leftrightarrow inc(i, i') \vee dec(i, i')$.
 - $inc(i, i') :\Leftrightarrow$ **if** $i < 2$ **then** $i' = i + 1$ **else** $i' = 0$.
 - $dec(i, i') :\Leftrightarrow$ **if** $i > 0$ **then** $i' = i - 1$ **else** $i' = 2$.



Composing Systems

Compose n components S_i to a concurrent system S .

- **State space** $\text{State} := \text{State}_0 \times \dots \times \text{State}_{n-1}$.
 - State_i is the state space of component i .
 - State space is Cartesian product of component state spaces.
 - Size of state space is product of the sizes of the component spaces.
- **Example:** three counters with state spaces \mathbb{N}_2 and \mathbb{N}_3 and \mathbb{N}_4 .





Fig. 1.9. The states of the product of the three counters

B.Berard et al: "Systems and Software Verification", 2001.




Initial States of Composed System

What are the initial states I of the composed system?

- Set $I := I_0 \times \dots \times I_{n-1}$.
 - I_i is the set of initial states of component i .
 - Set of initial states is Cartesian product of the sets of initial states of the individual components.
- Predicate $I(s_0, \dots, s_{n-1}) : \Leftrightarrow I_0(s_0) \wedge \dots \wedge I_{n-1}(s_{n-1})$.
 - I_i is the initial state condition of component i .
 - Initial state condition is conjunction of the initial state conditions of the components **on the corresponding projection** of the state.

Size of initial state set is the product of the sizes of the initial state sets of the individual components.



Transitions of Composed System

Which transitions can the composed system perform?

■ Synchronized composition.


- At each step, every component **must** perform a transition.
 - R_i is the transition relation of component i .

$$R(\langle s_0, \dots, s_{n-1} \rangle, \langle s'_0, \dots, s'_{n-1} \rangle) :\Leftrightarrow \\ R_0(s_0, s'_0) \wedge \dots \wedge R_{n-1}(s_{n-1}, s'_{n-1}).$$

■ Asynchronous composition.

- At each moment, every component **may** perform a transition.
 - At least one component performs a transition.
 - Multiple simultaneous transitions are possible
 - With n components, $2^n - 1$ possibilities of (combined) transitions.

$$R(\langle s_0, \dots, s_{n-1} \rangle, \langle s'_0, \dots, s'_{n-1} \rangle) :\Leftrightarrow \\ (R_0(s_0, s'_0) \wedge \dots \wedge s_{n-1} = s'_{n-1}) \vee \\ \dots \\ (s_0 = s'_0 \wedge \dots \wedge R_{n-1}(s_{n-1}, s'_{n-1})) \vee \\ \dots \\ (R_0(s_0, s'_0) \wedge \dots \wedge R_{n-1}(s_{n-1}, s'_{n-1})).$$



Example

System of three counters with state space \mathbb{N}_2 each.

- Synchronous composition:

$$[0, 0, 0] \xrightarrow{\quad} [1, 1, 1]$$

- Asynchronous composition:


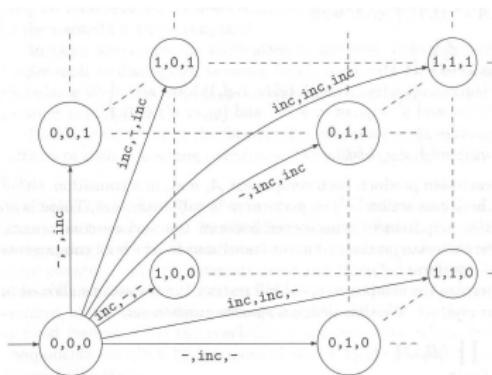


Fig. 1.10. A few transitions of the product of the three counters

B.Berard et al: "Systems and Software Verification", 2001.




Interleaving Execution

Simplified view of asynchronous execution.

- At each moment, only **one** component performs a transition.
 - Do not allow simultaneous transition $t_i|t_j$ of two components i and j .
 - Transition sequences $t_i; t_j$ and $t_j; t_i$ are possible.
 - All possible **interleavings** of component transitions are considered.
 - Nondeterminism is used to simulate concurrency.
 - Essentially no change of system properties.
- With n components, only n possibilities of a transition.


$$\begin{aligned} R(\langle s_0, s_1, \dots, s_{n-1} \rangle, \langle s'_0, s'_1, \dots, s'_{n-1} \rangle) : \Leftrightarrow \\ (R_0(s_0, s'_0) \wedge s_1 = s'_1 \wedge \dots \wedge s_{n-1} = s'_{n-1}) \vee \\ (s_0 = s'_0 \wedge R_1(s_1, s'_1) \wedge \dots \wedge s_{n-1} = s'_{n-1}) \vee \\ \dots \\ (s_0 = s'_0 \wedge s_1 = s'_1 \wedge \dots \wedge R_{n-1}(s_{n-1}, s'_{n-1})). \end{aligned}$$


Interleaving model (respectively a variant of it) suffices in practice.



Example

System of three counters with state space \mathbb{N}_2 each.

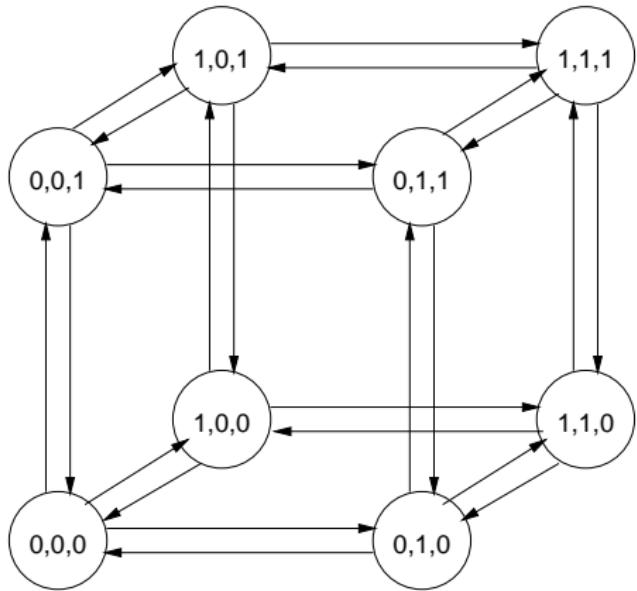



Digital Circuits

Synchronous composition of hardware components.

- A modulo 8 counter $C = \langle I_C, R_C \rangle$.

$State := \mathbb{N}_2 \times \mathbb{N}_2 \times \mathbb{N}_2$.

$$I_C(v_0, v_1, v_2) : \Leftrightarrow v_0 = v_1 = v_2 = 0.$$

$$\begin{aligned} R_C(\langle v_0, v_1, v_2 \rangle, \langle v'_0, v'_1, v'_2 \rangle) : & \Leftrightarrow \\ R_0(v_0, v'_0) \wedge \\ R_1(v_0, v_1, v'_1) \wedge \\ R_2(v_0, v_1, v_2, v'_2). \end{aligned}$$

$$R_0(v_0, v'_0) : \Leftrightarrow v'_0 = \neg v_0.$$

$$R_1(v_0, v_1, v'_1) : \Leftrightarrow v'_1 = v_0 \oplus v_1.$$

$$R_2(v_0, v_1, v_2, v'_2) : \Leftrightarrow v'_2 = (v_0 \wedge v_1) \oplus v_2.$$


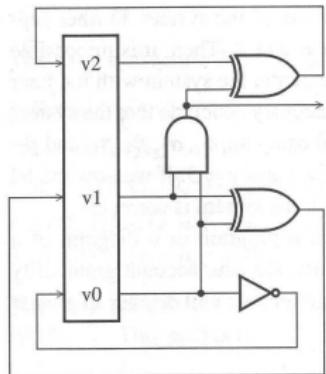


Figure 2.1
Synchronous modulo 8 counter.

Edmund Clarke et al: "Model Checking", 1999.



Concurrent Software

Asynchronous composition of software components with shared variables.

```
P ::  $l_0 : \text{while true do}$  || Q ::  $l_1 : \text{while true do}$ 
     $NC_0 : \text{wait } turn = 0$             $NC_1 : \text{wait } turn = 1$ 
     $CR_0 : turn := 1$                    $CR_1 : turn := 0$ 
 $\text{end}$                                  $\text{end}$ 
```

- A mutual exclusion program $M = \langle I_M, R_M \rangle$.

State := $PC \times PC \times \mathbb{N}_2$. // shared variable

$I_M(p, q, turn) :\Leftrightarrow p = l_0 \wedge q = l_1$.

$R_M(\langle p, q, turn \rangle, \langle p', q', turn' \rangle) :\Leftrightarrow$

$(P(\langle p, turn \rangle, \langle p', turn' \rangle) \wedge q' = q) \vee (Q(\langle q, turn \rangle, \langle q', turn' \rangle) \wedge p' = p)$.

$P(\langle p, turn \rangle, \langle p', turn' \rangle) :\Leftrightarrow$

$(p = l_0 \wedge p' = NC_0 \wedge turn' = turn) \vee$

$(p = NC_0 \wedge p' = CR_0 \wedge turn = 0 \wedge turn' = turn) \vee$


$(p = CR_0 \wedge p' = l_0 \wedge turn' = 1)$.

$Q(\langle q, turn \rangle, \langle q', turn' \rangle) :\Leftrightarrow$

$(q = l_1 \wedge q' = NC_1 \wedge turn' = turn) \vee$

$(q = NC_1 \wedge q' = CR_1 \wedge turn = 1 \wedge turn' = turn) \vee$

$(q = CR_1 \wedge q' = l_1 \wedge turn' = 0)$.



Concurrent Software


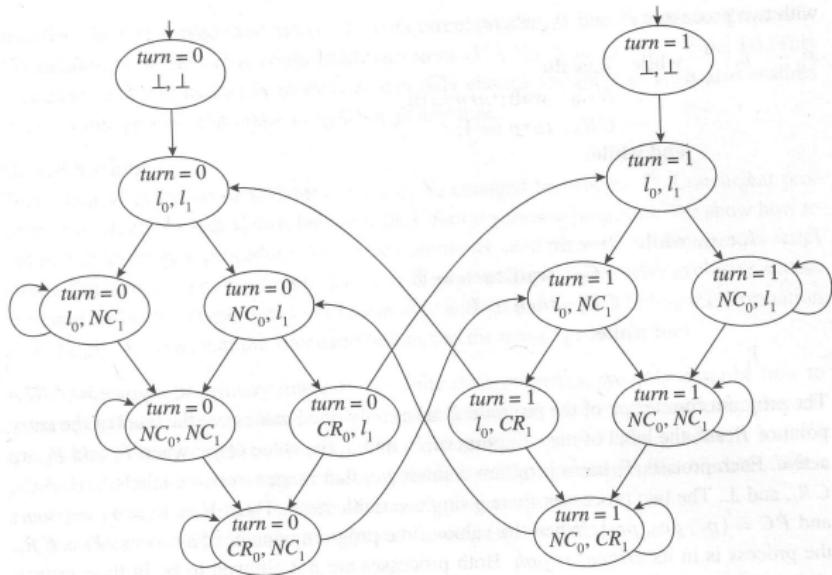


Figure 2.2
Reachable states of Kripke structure for mutual exclusion.

Edmund Clarke et al: "Model Checking", 1999.

Model guarantees mutual exclusion.




Modeling Commands

Transition relations are typically described in a particular form.

- $R(s, s') : \Leftrightarrow P(s) \wedge s' = F(s)$.
 - Precondition P on state in which transition can be performed.
 - If $P(s)$ holds, then there exists some s' such that $R(s, s')$.
 - Transition function F that determines the successor of s .
 - F is defined for all states for which s holds:
$$F : \{s \in \text{State} : P(s)\} \rightarrow \text{State}$$
- Examples:
 - Assignment: $I : x := e; m : \dots$
 - $R(\langle x, y \rangle, \langle x', y' \rangle) : \Leftrightarrow pc = I \wedge (x' = e \wedge y' = y \wedge pc' = m)$.
 - Wait statement: $I : \text{wait } P(x, y); m : \dots$
 - $R(\langle x, y \rangle, \langle x', y' \rangle) : \Leftrightarrow pc = I \wedge P(x, y) \wedge (x' = x \wedge y' = y \wedge pc' = m)$.
 - Guarded assignment: $I : P(x, y) \rightarrow x := e; m : \dots$
 - $R(\langle x, y \rangle, \langle x', y' \rangle) : \Leftrightarrow pc = I \wedge P(x, y) \wedge (x' = e \wedge y' = y \wedge pc' = m)$.


Most programming language commands can be translated into this form.



Message Passing Systems

How to model an asynchronous system without shared variables where the components communicate/synchronize by exchanging messages?

- Given a label set $\text{Label} = \text{Int} \cup \text{Ext} \cup \overline{\text{Ext}}$.
 - Disjoint sets Int and Ext of internal and external labels.
 - “Anonymous” label $_-\in \text{Int}$.
 - Complementary label set $\overline{L} := \{\overline{l} : l \in L\}$.
- A **labeled system** is a pair $\langle I, R \rangle$.
 - Initial state condition $I \subseteq \text{State}$.
 - Labeled transition relation $R \subseteq \text{Label} \times \text{State} \times \text{State}$.
- A **run** of a labeled system $\langle I, R \rangle$ is a (finite or infinite) sequence $s_0 \xrightarrow{l_0} s_1 \xrightarrow{l_1} \dots$ of states such that
 - $s_0 \in I$.
 - $R(l_i, s_i, s_{i+1})$ (for all sequence indices i).
 - If s ends in a state s_n , there is no label l and state t s.t. $R(l, s_n, t)$.




Synchronization by Message Passing

Compose a set of n labeled systems $\langle I_i, R_i \rangle$ to a system $\langle I, R \rangle$.

- **State space** $State := State_0 \times \dots \times State_{n-1}$.
- **Initial states** $I := I_0 \times \dots \times I_{n-1}$.
 - $I(s_0, \dots, s_{n-1}) : \Leftrightarrow I_0(s_0) \wedge \dots \wedge I_{n-1}(s_{n-1})$.
- **Transition relation**

$$\begin{aligned} R(I, \langle s_i \rangle_{i \in \mathbb{N}_n}, \langle s'_i \rangle_{i \in \mathbb{N}_n}) \Leftrightarrow \\ (I \in Int \wedge \exists i \in \mathbb{N}_n : \\ R_i(I, s_i, s'_i) \wedge \forall k \in \mathbb{N}_n \setminus \{i\} : s_k = s'_k) \vee \\ (I = _ \wedge \exists I \in Ext, i \in \mathbb{N}_n, j \in \mathbb{N}_n : \\ R_i(I, s_i, s'_i) \wedge R_j(\bar{I}, s_j, s'_j) \wedge \forall k \in \mathbb{N}_n \setminus \{i, j\} : s_k = s'_k). \end{aligned}$$

Either a component performs an internal transition or two components simultaneously perform an external transition with complementary labels.



Example

$0 :: \text{loop}$

$a_0 : \text{send}(i)$
 $a_1 : i := \text{receive}()$
 $a_2 : i := i + 1$
end

$1 :: \text{loop}$

$b_0 : j := \text{receive}()$
 $b_1 : j := j + 1$
 $b_2 : \text{send}(j)$
end

- Two labeled systems $\langle I_0, R_0 \rangle$ and $\langle I_1, R_1 \rangle$.

$\text{State}_0 = \text{State}_1 = PC \times \mathbb{N}$, $\text{Internal} := \{A, B\}$, $\text{External} := \{M, N\}$.

$I_0(p, i) :\Leftrightarrow p = a_0 \wedge i \in \mathbb{N}$; $I_1(q, j) :\Leftrightarrow q = b_0$.

$R_0(I, \langle p, i \rangle, \langle p', i' \rangle) :\Leftrightarrow$

$(I = \overline{M} \wedge p = a_0 \wedge p' = a_1 \wedge i' = i) \vee$

$(I = N \wedge p = a_1 \wedge p' = a_2 \wedge i' = j) \vee // \text{illegal!}$


$(I = A \wedge p = a_2 \wedge p' = a_0 \wedge i' = i + 1).$

$R_1(I, \langle q, j \rangle, \langle q', j' \rangle) :\Leftrightarrow$

$(I = M \wedge q = b_0 \wedge q' = b_1 \wedge j' = i) \vee // \text{illegal!}$

$(I = B \wedge q = b_1 \wedge q' = b_2 \wedge j' = j + 1) \vee$

$(I = \overline{N} \wedge q = b_2 \wedge q' = b_0 \wedge j' = j).$



Example (Continued)


Composition of $\langle I_0, R_0 \rangle$ and $\langle I_1, R_1 \rangle$ to $\langle I, R \rangle$.

$State = (PC \times \mathbb{N}) \times (PC \times \mathbb{N})$.

$I(p, i, q, j) :\Leftrightarrow p = a_0 \wedge i \in \mathbb{N} \wedge q = b_0$.

$R(I, \langle p, i, q, j \rangle, \langle p', i', q', j' \rangle) :\Leftrightarrow$
 $(I = A \wedge (p = a_2 \wedge p' = a_0 \wedge i' = i + 1) \wedge (q' = q \wedge j' = j)) \vee$
 $(I = B \wedge (p' = p \wedge i' = i) \wedge (q = b_1 \wedge q' = b_2 \wedge j' = j + 1)) \vee$
 $(I = - \wedge (p = a_0 \wedge p' = a_1 \wedge i' = i) \wedge (q = b_0 \wedge q' = b_1 \wedge j' = i)) \vee$
 $(I = - \wedge (p = a_1 \wedge p' = a_2 \wedge i' = j) \wedge (q = b_2 \wedge q' = b_0 \wedge j' = j))$.

Problem: state relation of each component refers to local variable of other component (variables are shared).



Example (Revised)

0 :: loop

$a_0 : \text{send}(i)$
 $a_1 : i := \text{receive}()$
 $a_2 : i := i + 1$

end

1 :: loop

$b_0 : j := \text{receive}()$
 $b_1 : j := j + 1$
 $b_2 : \text{send}(j)$

end

- Two labeled systems $\langle I_0, R_0 \rangle$ and $\langle I_1, R_1 \rangle$.

...

External := $\{M_k : k \in \mathbb{N}\} \cup \{N_k : k \in \mathbb{N}\}$.

$R_0(I, \langle p, i \rangle, \langle p', i' \rangle) :\Leftrightarrow$

$(I = \overline{M_i} \wedge p = a_0 \wedge p' = a_1 \wedge i' = i) \vee$

$(\exists k \in \mathbb{N} : I = N_k \wedge p = a_1 \wedge p' = a_2 \wedge i' = k) \vee$

$(I = A \wedge p = a_2 \wedge p' = a_0 \wedge i' = i + 1)$.


$R_1(I, \langle q, j \rangle, \langle q', j' \rangle) :\Leftrightarrow$

$(\exists k \in \mathbb{N} : I = M_k \wedge q = b_0 \wedge q' = b_1 \wedge j' = k) \vee$

$(I = B \wedge q = b_1 \wedge q' = b_2 \wedge j' = j + 1) \vee$

$(I = \overline{N_j} \wedge q = b_2 \wedge q' = b_0 \wedge j' = j)$.

Encode message value in label.



Example (Continued)


Composition of $\langle I_0, R_0 \rangle$ and $\langle I_1, R_1 \rangle$ to $\langle I, R \rangle$.

$$State = (PC \times \mathbb{N}) \times (PC \times \mathbb{N}).$$


$$I(p, i, q, j) :\Leftrightarrow p = a_0 \wedge i \in \mathbb{N} \wedge q = b_0.$$

$$\begin{aligned} R(I, \langle p, i, q, j \rangle, \langle p', i', q', j' \rangle) :\Leftrightarrow \\ & (I = A \wedge (p = a_2 \wedge p' = a_0 \wedge i' = i + 1) \wedge (q' = q \wedge j' = j)) \vee \\ & (I = B \wedge (p' = p \wedge i' = i) \wedge (q = b_1 \wedge q' = b_2 \wedge j' = j + 1)) \vee \\ & (I = _ \wedge \exists k \in \mathbb{N} : k = i \wedge \\ & \quad (p = a_0 \wedge p' = a_1 \wedge i' = i) \wedge (q = b_0 \wedge q' = b_1 \wedge j' = k)) \vee \\ & (I = _ \wedge \exists k \in \mathbb{N} : k = j \wedge \\ & \quad (p = a_1 \wedge p' = a_2 \wedge i' = k) \wedge (q = b_2 \wedge q' = b_0 \wedge j' = j)). \end{aligned}$$

Logically equivalent to previous definition of transition relation.




-
- 1. A Client/Server System
 - 2. Modeling Concurrent Systems
 - 3. A Model of the Client/Server System



Basic Idea

Asynchronous composition of three components $Client_1$, $Client_2$, $Server$.


- $Client_i$: $State := PC \times \mathbb{N}_2 \times \mathbb{N}_2$.
 - Three variables pc , $request$, $answer$.
 - pc represents the program counter.
 - $request$ is the buffer for outgoing requests.
 - Filled by client, when a request is to be sent to server.
 - $answer$ is the buffer for incoming answers.
 - Checked by client, when it waits for an answer from the server.
- $Server$: $State := (\mathbb{N}_3)^3 \times (\{1, 2\} \rightarrow \mathbb{N}_2)^2$.
 - Variables $given$, $waiting$, $sender$, $rbuffer$, $sbuffer$.
 - No program counter.
 - We use the value of $sender$ to check whether server waits for a request ($sender = 0$) or answers a request ($sender \neq 0$).
 - Variables $given$, $waiting$, $sender$ as in program.
 - $rbuffer(i)$ is the buffer for incoming requests from client i .
 - $sbuffer(i)$ is the buffer for outgoing answers to client i .



External Transitions

- $Ext := \{REQ_1, REQ_2, ANS_1, ANS_2\}$.
 - Transition labeled REQ_i transmits a request from client i to server.
 - Enabled when $request \neq 0$ in client i .
 - Effect in client i : $request' = 0$.
 - Effect in server: $rbuffer'(i) = 1$.
 - Transition labeled ANS_i transmits an answer from server to client i
 - Enabled when $sbuffer(i) \neq 0$.
 - Effect in server: $sbuffer'(i) = 0$.
 - Effect in client i : $answer' = 1$.

The external transitions correspond to system-level actions of the communication subsystem (rather than to the user-level actions of the client/server program).



The Client

Client system $C_i = \langle IC_i, RC_i \rangle$.

State := $PC \times \mathbb{N}_2 \times \mathbb{N}_2$.

Int := $\{R_i, S_i, C_i\}$.

$IC_i(pc, request, answer) \Leftrightarrow$
 $pc = R \wedge request = 0 \wedge answer = 0$.


$RC_i(I, \langle pc, request, answer \rangle,$
 $\langle pc', request', answer' \rangle) \Leftrightarrow$
 $(I = R \wedge pc = R \wedge request = 0 \wedge$
 $pc' = S \wedge request' = 1 \wedge answer' = answer) \vee$
 $(I = S \wedge pc = S \wedge answer \neq 0 \wedge$
 $pc' = C \wedge request' = request \wedge answer' = 0) \vee$
 $(I = C \wedge pc = C \wedge request = 0 \wedge$
 $pc' = R \wedge request' = 1 \wedge answer' = answer) \vee$

```

Client(ident):
    param ident
begin
    loop
        ...
        R: sendRequest()
        S: receiveAnswer()
        C: // critical region
        ...
        sendRequest()
    endloop
end Client

```

$(I = \overline{REQ} ; \wedge request \neq 0 \wedge$
 $pc' = pc \wedge request' = 0 \wedge answer' = answer) \vee$
 $(I = ANS; \wedge$
 $pc' = pc \wedge request' = request \wedge answer' = 1)$.



The Server

Server system $S = \langle IS, RS \rangle$.

State := $(\mathbb{N}_3)^3 \times (\{1, 2\} \rightarrow \mathbb{N}_2)^2$.

Int := $\{D1, D2, F, A1, A2, W\}$.

$IS(given, waiting, sender, rbuffer, sbuffer) :\Leftrightarrow$
 $given = waiting = sender = 0 \wedge$
 $rbuffer(1) = rbuffer(2) = sbuffer(1) = sbuffer(2) = 0$.

$RS(l, \langle given, waiting, sender, rbuffer, sbuffer \rangle,$
 $\langle given', waiting', sender', rbuffer', sbuffer' \rangle) :\Leftrightarrow$
 $\exists i \in \{1, 2\} :$
 $(l = D_i \wedge sender = 0 \wedge rbuffer(i) \neq 0 \wedge$
 $sender' = i \wedge rbuffer'(i) = 0 \wedge$
 $U(given, waiting, sbuffer) \wedge$
 $\forall j \in \{1, 2\} \setminus \{i\} : U_j(rbuffer)) \vee$
 \dots


$U(x_1, \dots, x_n) :\Leftrightarrow x'_1 = x_1 \wedge \dots \wedge x'_n = x_n$.

$U_j(x_1, \dots, x_n) :\Leftrightarrow x'_j(j) = x_1(j) \wedge \dots \wedge x'_n(j) = x_n(j)$.

```

Server:
  local given, waiting, sender
begin
  given := 0; waiting := 0
loop
D:  sender := receiveRequest()
    if sender = given then
      if waiting = 0 then
F:      given := 0
      else
A1:      given := waiting;
      waiting := 0
      sendAnswer(given)
      endif
    elseif given = 0 then
A2:      given := sender
      sendAnswer(given)
      else
W:      waiting := sender
      endif
    endloop
end Server

```



The Server (Contd)

...

$$(I = F \wedge \text{sender} \neq 0 \wedge \text{sender} = \text{given} \wedge \text{waiting} = 0 \wedge \text{given}' = 0 \wedge \text{sender}' = 0 \wedge U(\text{waiting}, \text{rbuffer}, \text{sbuffer})) \vee$$

$$(I = A1 \wedge \text{sender} \neq 0 \wedge \text{sbuffer}(\text{waiting}) = 0 \wedge \text{sender} = \text{given} \wedge \text{waiting} \neq 0 \wedge \text{given}' = \text{waiting} \wedge \text{waiting}' = 0 \wedge \text{sbuffer}'(\text{waiting}) = 1 \wedge \text{sender}' = 0 \wedge U(\text{rbuffer}) \wedge \forall j \in \{1, 2\} \setminus \{\text{waiting}\} : U_j(\text{sbuffer})) \vee$$

$$(I = A2 \wedge \text{sender} \neq 0 \wedge \text{sbuffer}(\text{sender}) = 0 \wedge \text{sender} \neq \text{given} \wedge \text{given} = 0 \wedge \text{given}' = \text{sender} \wedge \text{sbuffer}'(\text{sender}) = 1 \wedge \text{sender}' = 0 \wedge U(\text{waiting}, \text{rbuffer}) \wedge \forall j \in \{1, 2\} \setminus \{\text{sender}\} : U_j(\text{sbuffer})) \vee$$


...

Server:

```

local given, waiting, sender
begin
  given := 0; waiting := 0
  loop
    D:  sender := receiveRequest()
        if sender = given then
          if waiting = 0 then
            F:      given := 0
            else
              A1:   given := waiting;
                  waiting := 0
                  sendAnswer(given)
                  endif
            elsif given = 0 then
              A2:   given := sender
                  sendAnswer(given)
            else
              W:    waiting := sender
                  endif
            endloop
  end Server

```



The Server (Contd'2)

...
 $(I = W \wedge \text{sender} \neq 0 \wedge \text{sender} \neq \text{given} \wedge \text{given} \neq 0 \wedge$
 $\text{waiting}' := \text{sender} \wedge \text{sender}' = 0 \wedge$
 $U(\text{given}, \text{rbuffer}, \text{sbuffer})) \vee$

$\exists i \in \{1, 2\} :$


$(I = \text{REQ} ; \wedge \text{rbuffer}'(i) = 1 \wedge$
 $U(\text{given}, \text{waiting}, \text{sender}, \text{sbuffer}) \wedge$
 $\forall j \in \{1, 2\} \setminus \{i\} : U_j(\text{rbuffer})) \vee$

$(I = \overline{\text{ANS}}_i \wedge \text{sbuffer}(i) \neq 0 \wedge$
 $\text{sbuffer}'(i) = 0 \wedge$
 $U(\text{given}, \text{waiting}, \text{sender}, \text{rbuffer}) \wedge$
 $\forall j \in \{1, 2\} \setminus \{i\} : U_j(\text{sbuffer})).$

```

Server:
  local given, waiting, sender
begin
  given := 0; waiting := 0
loop
D:  sender := receiveRequest()
    if sender = given then
      if waiting = 0 then
F:      given := 0
      else
A1:      given := waiting;
      waiting := 0
      sendAnswer(given)
      endif
    elseif given = 0 then
A2:      given := sender
      sendAnswer(given)
      else
W:      waiting := sender
      endif
    endloop
end Server

```



Communication Channels

We also model the communication medium between components.



- **Bounded channel** $Channel_{i,j} = (ICH, RCH)$.
 - Transfers message from component with address i to component j .
 - May hold at most N messages at a time (for some N).
 - $State := \langle Value \rangle$.
 - Sequence of values of type $Value$.
 - $Ext := \{SEND_{i,j}(m) : m \in Value\} \cup \{RECEIVE_{i,j}(m) : m \in Value\}$.
 - By $SEND_{i,j}(m)$, channel receives from sender i a message m destined for receiver j ; by $RECEIVE_{i,j}(m)$, channel forwards that message.


$$ICH(queue) :\Leftrightarrow queue = \langle \rangle.$$

$$RCH(i, queue, queue') :\Leftrightarrow$$

$$\exists i \in Address, j \in Address, m \in Value :$$


$$(i = SEND_{i,j}(m) \wedge |queue| < N \wedge queue' = queue \circ \langle m \rangle) \vee$$

$$(i = \overline{RECEIVE}_{i,j}(m) \wedge |queue| > 0 \wedge queue = \langle m \rangle \circ queue').$$




Client/Server Example with Channels

- Server receives address 0.
 - Label REQ_i is renamed to $RECEIVE_{i,0}(R)$.
 - Label \overline{ANS}_i is renamed to $\overline{SEND}_{0,i}(A)$.
- Client i receives address i ($i \in \{1, 2\}$).
 - Label \overline{REQ}_i is renamed to $\overline{SEND}_{i,0}(R)$.
 - Label ANS_i is renamed to $RECEIVE_{0,i}(A)$.
- System is composed of seven components:
 - $Server$, $Client_1$, $Client_2$.
 - $Channel_{0,1}$, $Channel_{1,0}$.
 - $Channel_{0,2}$, $Channel_{2,0}$.



Also channels are active system components.



Summary

We have now seen a model of a client/server system.

- A system is described by
 - its (finite or infinite) **state space**,
 - the **initial state condition** (set of input states),
 - the **transition relation** on states.
- State space of composed system is **product of component spaces**.
 - Variable shared among components occurs only once in product.
- System composition can be
 - **synchronous**: conjunction of individual transition relations.
 - Suitable for digital hardware.
 - **asynchronous**: disjunction of relations.
 - **Interleaving** model: each relation conjoins the transition relation of one component with the identity relations of all other components.
 - Suitable for concurrent software.
- **Labels** may be introduced for synchronization/communication.
 - Simultaneous transition of two components.
 - Label may describe value to be communicated.