



Numerics

Wolfgang Schreiner
Wolfgang.Schreiner@risc.uni-linz.ac.at

Research Institute for Symbolic Computation (RISC)
Johannes Kepler University, Linz, Austria
<http://www.risc.uni-linz.ac.at>



1. Integers and Floating Point Numbers


2. Complex Numbers

3. Rational Numbers

4. Numerical Vectors

5. Numerical Algorithms

<cstdlib>: C General Utilities



C Standard General Utilities Library

This header defines several general purpose functions, including dynamic memory management, random number generation, communication with the environment, integer arithmetics, searching, sorting and converting.

Integer arithmetics:

abs Absolute value (function)
div Integral division (function)
labs Absolute value (function)
ldiv Integral division (function)


Types

div_t Structure returned by div (type)
ldiv_t Structure returned by div and ldiv (type)
size_t Unsigned integral type (type)

...

In C++, these functions are overloaded in various numerical types.

Example: abs



```
int abs ( int n );  
long abs ( long n );
```

Absolute value

Returns the absolute value of parameter n.

In C++, this function is overloaded in <cmath> for floating-point types (see cmath abs), in <complex> for complex numbers (see complex abs), and in <valarray> for valarrays (see valarray abs).

Parameters

n
Integral value.


Return Value

The absolute value of n.

Portability

In C, only the int version exists.

Example: div



```
div_t div ( int numerator, int denominator );
ldiv_t div ( long numerator, long denominator );
```

Integral division

Returns the integral quotient and remainder of the division of numerator by denominator as a structure of type `div_t` or `ldiv_t`, which has two members: `quot` and `rem`.

Parameters


```
numerator
    Numerator.
denom
    Denominator.
```

Return Value

The result is returned by value in a structure defined in `<stdlib>`, which has two members. For `div_t`, these are, in either order:

```
int quot; int rem;
and for ldiv_t:
long quot; long rem;
```

<cmath>: C Numerics Library



C numerics library

`cmath` declares a set of functions to compute common mathematical operations and transformations:


Trigonometric functions:

```
cos      Compute cosine (function)
sin      Compute sine (function)
tan      Compute tangent (function)
acos     Compute arc cosine (function)
asin     Compute arc sine (function)
atan     Compute arc tangent (function)
atan2    Compute arc tangent with two parameters (function)
```

Hyperbolic functions:

```
cosh     Compute hyperbolic cosine (function)
sinh     Compute hyperbolic sine (function)
tanh     Compute hyperbolic tangent (function)
```

<cmath>: C Numerics Library



Exponential and logarithmic functions:

```
exp      Compute exponential function (function)
frexp    Get significand and exponent (function)
ldexp    Generate number from significand and exponent (function)
log      Compute natural logarithm (function)
log10    Compute common logarithm (function)
modf     Break into fractional and integral parts (function)
```

Power functions


```
pow      Raise to power (function)
sqrt     Compute square root (function)
```

Rounding, absolute value and remainder functions:

```
ceil     Round up value (function)
fabs     Compute absolute value (function)
floor    Round down value (function)
fmod     Compute remainder of division (function)
```

In C++, these functions are overloaded in various numerical types.

Example: cos



```
double cos ( double x );
float cos ( float x );
long double cos ( long double x );
```

Compute cosine

Returns the cosine of an angle of `x` radians.

In C++, this function is overloaded in `<complex>` and `<valarray>` (see `complex cos` and `valarray cos`).

Parameters

```
x
    Floating point value representing an angle expressed in radians.
```


Return Value

Cosine of `x`.

Portability

In C, only the double version of this function exists with this name.

Example: Ranges of Numerical Types



```
#include <iostream>
#include <limits>
using namespace std;

template<typename T>
void showMinMax( ) {
    cout << "min: " << numeric_limits<T>::min( ) << endl;
    cout << "max: " << numeric_limits<T>::max( ) << endl << endl;
}

int main( ) {
    cout << "short:" << endl; showMinMax<short>( );
    cout << "int:" << endl; showMinMax<int>( );
    cout << "long:" << endl; showMinMax<long>( );
    cout << "float:" << endl; showMinMax<float>( );
    cout << "double:" << endl; showMinMax<double>( );
    cout << "long double:" << endl; showMinMax<long double>( );
    cout << "unsigned short:" << endl; showMinMax<unsigned short>( );
    cout << "unsigned int:" << endl; showMinMax<unsigned int>( );
    cout << "unsigned long:" << endl; showMinMax<unsigned long>( );
}
```

D. Ryan Stepens et al: "C++ Cookbook"

Wolfgang Schreiner

<http://www.risc.uni-linz.ac.at>

9/48


1. Integers and Floating Point Numbers

2. Complex Numbers

3. Rational Numbers

4. Numerical Vectors

5. Numerical Algorithms




Wolfgang Schreiner

<http://www.risc.uni-linz.ac.at>

10/48

<complex>: Complex Numbers



```
template <typename T> class complex;
```

Complex number class

The complex class is designed to hold two components of the same type, that conform a complex number. ...

The class has been implemented to provide as similar a functionality as the one of a numerical type when this was possible, therefore, complex objects can be assigned, compared, inserted and extracted, as well as several arithmetical operators have been overloaded to be used on them directly.

complex specializations

complex is specialized for the three fundamental floating-point types: float, double and long double.


These specializations have the same members as the template, but optimize its implementation for these fundamental types, as well as they allow operations with other instantiations of complex (complex objects with different template argument).

Wolfgang Schreiner

<http://www.risc.uni-linz.ac.at>

11/48

<complex>: Complex Numbers



```
template <typename T> class complex {
public:
    typedef T value_type;

    complex (const T& re = T(), const T& im = T());
    complex (const complex& cplx);
    template<class X> complex (const complex<X>& cplx);

    T real() const; T imag() const;

    complex& operator= (const T& val); complex& operator= (const complex& rhs);

    complex& operator+= (const T& val); complex& operator-= (const T& val);
    complex& operator*= (const T& val); complex& operator/= (const T& val);


    template<class X> complex& operator= (const complex<X>& rhs);
    template<class X> complex& operator+= (const complex<X>& rhs);
    template<class X> complex& operator-= (const complex<X>& rhs);
    template<class X> complex& operator*= (const complex<X>& rhs);
    template<class X> complex& operator/= (const complex<X>& rhs);
};
```

Wolfgang Schreiner

<http://www.risc.uni-linz.ac.at>

12/48

<complex>: Complex Numbers



```
template<class T> complex<T> operator+(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator+(const complex<T>& x, const T& val);
template<class T> complex<T> operator+(const T& val, const complex<T>& y);


template<class T> complex<T> operator-(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator-(const complex<T>& x, const T& val);
template<class T> complex<T> operator-(const T& val, const complex<T>& y);

template<class T> complex<T> operator*(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator*(const complex<T>& x, const T& val);
template<class T> complex<T> operator*(const T& val, const complex<T>& y);

template<class T> complex<T> operator/(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator/(const complex<T>& x, const T& val);
template<class T> complex<T> operator/(const T& val, const complex<T>& y);

template<class T> complex<T> operator+(const complex<T>& y);
template<class T> complex<T> operator-(const complex<T>& y);
```

<complex>: Complex Numbers




```
template<class T> complex<T> operator==(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator==(const complex<T>& x, const T& val);
template<class T> complex<T> operator==(const T& val, const complex<T>& y);

template<class T> complex<T> operator!=(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> operator!=(const complex<T>& x, const T& val);
template<class T> complex<T> operator!=(const T& val, const complex<T>& y);

template<class T, class charT, class traits>
    basic_istream<charT,traits>&
        operator>>(basic_istream<charT,traits>& istr, const complex<T>& y);
template<class T, class charT, class traits>
    basic_ostream<charT,traits>&
        operator<<(basic_ostream<charT,traits>& ostr, const complex<T>& y);

template<class T> T real(const complex<T>& x);
template<class T> T imag(const complex<T>& x);
template<class T> complex<T> polar(const T& rho, const T& theta = 0);
template<class T> T arg(const complex<T>& x);
template<class T> T norm(const complex<T>& x);
```


<complex>: Complex Numbers



```
template<class T> T abs(const complex<T>& x);
template<class T> complex<T> conj(const complex<T>& x);
template<class T> complex<T> cos(const complex<T>& x);
template<class T> complex<T> cosh(const complex<T>& x);
template<class T> complex<T> exp(const complex<T>& x);
template<class T> complex<T> log(const complex<T>& x);
template<class T> complex<T> log10(const complex<T>& x);
template<class T> complex<T> pow(const complex<T>& x, int y);
template<class T> complex<T> pow(const complex<T>& x, const complex<T>& y);
template<class T> complex<T> pow(const complex<T>& x, const T& y);
template<class T> complex<T> pow(const T& x, const complex<T>& y);
template<class T> complex<T> sin(const complex<T>& x);
template<class T> complex<T> sinh(const complex<T>& x);
template<class T> complex<T> sqrt(const complex<T>& x);
template<class T> complex<T> tan(const complex<T>& x);
template<class T> complex<T> tanh(const complex<T>& x);
```

Very similar to use as the fundamental numeric types.

Example: Working with Polar Coordinates



Let us manipulate polar coordinates.

```
#include <complex>
#include <iostream>


using namespace std;
...

int main( ) {
    double rho = 3.0; // magnitude
    double theta = 3.141592 / 2; // angle
    complex<double> coord = polar(rho, theta);
    cout << "rho = " << abs(coord) << ", theta = " << arg(coord) << endl;
    coord += polar(4.0, 0.0);
    cout << "rho = " << abs(coord) << ", theta = " << arg(coord) << endl;
}

rho = 3, theta = 1.5708
rho = 5, theta = 0.643501
```

D. Ryan Stephens et al: "C++ Cookbook"

Example: A Polar Coordinate Class



Let us have a polar representation of complex numbers.

```
#include <complex>
#include <iostream>


using namespace std;

...

int main() {
    double rho = 3.0; // magnitude
    double theta = 3.141592 / 2; // angle
    Polar coord(rho, theta);
    cout << "rho = " << coord.rho() << ", theta = " << coord.theta() << endl;
    coord += Polar(4.0, 0.0);
    cout << "rho = " << coord.rho() << ", theta = " << coord.theta() << endl;
    system("pause");
}
```

D. Ryan Stepens et al: "C++ Cookbook"

Example: A Polar Coordinate Class



```
template<typename T> class BasicPolar
{
    complex<T> m;
public:
    typedef BasicPolar self;


    // constructors
    BasicPolar() : m() { }
    BasicPolar(const self& x) : m(x.m) { }
    BasicPolar(const T& rho, const T& theta) : m(polar(rho, theta)) { }

    // public member functions
    T rho() const { return abs(m); }
    T theta() const { return arg(m); }

    // comparison operators
    friend bool operator==(const self& x, const self& y) { return x.m == y.m; }
    friend bool operator!=(const self& x, const self& y) { return x.m != y.m; }

    ...
};
```

Example: A Polar Coordinate Class



```
template<typename T> class BasicPolar
{
    ...

    // assignment operations
    self& operator-( ) { return Polar(-m); }
    self& operator+=(const self& x) { m += x.m; return *this; }
    self& operator-=(const self& x) { m -= x.m; return *this; }
    self& operator*=(const self& x) { m *= x.m; return *this; }
    self& operator/=(const self& x) { m /= x.m; return *this; }
    operator complex<T>( ) const { return m; }


    // binary operations
    friend self operator+(self x, const self& y) { return x += y; }
    friend self operator-(self x, const self& y) { return x -= y; }
    friend self operator*(self x, const self& y) { return x *= y; }
    friend self operator/(self x, const self& y) { return x /= y; }

};

typedef BasicPolar<double> Polar;
```

1. Integers and Floating Point Numbers
2. Complex Numbers
3. Rational Numbers
4. Numerical Vectors
5. Numerical Algorithms

Rational Numbers




```
template<typename T> class rational {
    T num_; T den_; void reduce();
public:
    typedef T value_type;
    rational()          : num_(0),  den_(1) {}
    rational(value_type num) : num_(num), den_(1) {}
    rational(value_type num, value_type den): num_(num), den_(den) { reduce(); }
    rational(const rational& r): num_(r.num_), den_(r.den_) {}
    template<typename U>
    rational(const rational<U>& r): num_(r.num_), den_(r.den_) { reduce(); }

    rational& operator=(const rational& r)
    { num_ = r.num_; den_ = r.den_; return *this; }
    template<typename U> rational& operator=(const rational<U>& r)
    { assign(r.numerator(), r.denominator()); return *this; }

    void assign(value_type n, value_type d) { num_ = n; den_ = d; reduce(); }

    value_type numerator() const { return num_; }
    value_type denominator() const { return den_; }
};
```


Rational Numbers



```
// Reduce the numerator and denominator by the gcd.
// Ensure the denominator is nonnegative.
template<typename T>
void rational<T>::reduce() {
    if (den_ < 0) { den_ = -den_; num_ = -num_; }
    T d = gcd(num_, den_);
    num_ /= d;
    den_ /= d;
}

// Greatest common divisor using Euclid's algorithm.
template<typename T>
T gcd(T n, T d) {
    n = abs(n);
    while (d != 0) {
        T t = n % d;
        n = d;
        d = t;
    }
    return n;
}
```

Rational Numbers




```
// Multiplication assignment operator.
template<typename T, typename U>
rational<T>& operator*=(rational<T>& dst, const rational<U>& src) {
    dst.assign(dst.numerator() * src.numerator(),
              dst.denominator() * src.denominator());
    return dst;
}

// Multiply two rational numbers.
template<typename T>
rational<T> operator*(const rational<T>& a, const rational<T>& b)
{ rational<T> result(a); result *= b; return result; }

// Multiply rational times an integral value.
template<typename T>
rational<T> operator*(const T& a, const rational<T>& b)
{ return rational<T>(a * b.numerator(), b.denominator()); }

template<typename T>
rational<T> operator*(const rational<T>& a, const T& b)
{ return rational<T>(b * a.numerator(), a.denominator()); }
```


Rational Numbers



```
// Comparison. All other comparisons can be implemented
// in terms of operator== and operator<.
template<typename T>
bool operator==(const rational<T>& a, const rational<T>& b)
{
    // Precondition: both operands are reduced.
    return a.numerator() == b.numerator() &&
           a.denominator() == b.denominator();
}

template<typename T>
bool operator<(const rational<T>& a, const rational<T>& b)
{
    return a.numerator() * b.denominator() <
           b.numerator() * a.denominator();
}
```

Ray Lischner: "C++ in a Nutshell"




1. Integers and Floating Point Numbers

2. Complex Numbers

3. Rational Numbers

4. Numerical Vectors

5. Numerical Algorithms



<valarray>: Numerical Vectors

Vectors optimized for numerical operations.


```
#include <valarray>
#include <iostream>

using namespace std;

int main( ) {
    valarray<int> v(3);
    v[0] = 1; v[1] = 2; v[2] = 3;
    cout << v[0] << ", " << v[1] << ", " << v[2] << endl;
    v = v + v;
    cout << v[0] << ", " << v[1] << ", " << v[2] << endl;
    v /= 2;
    cout << v[0] << ", " << v[1] << ", " << v[2] << endl;
}

1, 2, 3
2, 4, 6
1, 2, 3
```

D. Ryan Stephens et al: "C++ Cookbook"




<valarray>: Constructors

```
template <typename T> class valarray {
public:
    typedef T value_type;

    valarray();
    explicit valarray (size_t n);
    valarray (const T& val, size_t n);
    valarray (const T* p, size_t n);
    valarray (const valarray& x);
    valarray (const slice_array<T>& sub);
    valarray (const gslice_array<T>& sub);
    valarray (const mask_array<T>& sub);
    valarray (const indirect_array<T>& sub);

    ~valarray ();
    ...
}
```



<valarray>: Constructor Example


```
#include <iostream>
#include <valarray>
using namespace std;

int main ()
{
    int init[] = {10,20,30,40};
    valarray<int> first;           // (empty)
    valarray<int> second (5);     // 0 0 0 0 0
    valarray<int> third (10,3);   // 10 10 10
    valarray<int> fourth (init,4); // 10 20 30 40
    valarray<int> fifth (fourth); // 10 20 30 40

    cout << "fifth sums " << fifth.sum() << endl;

    return 0;
}
```

<valarray>: Members




```
template <typename T> class valarray {
...
    size_t size() const;           // number of elements in valarray
    void resize (size_t sz, T c = T()); // resize valarray

    T max() const;                // maximum element in valarray
    T min() const;                // minimum element in valarray
    T sum() const;                // sum of all elements in valarray

    // n > 0: shift left, n < 0: shift right
    valarray<T> shift (int n) const; // shift by n elements
    valarray<T> cshift (int n) const; // cyclically shift by n elements

    valarray<T> apply (T func(T)) const; // apply func to every element
    valarray<T> apply (T func(const T&)) const;
    ...
}
```

<valarray>: Examples




```
int increment (int x) {return ++x;}
int init[]={10,20,30,40,50};

valarray<int> avalarray (init,5);           // 10 20 30 40 50
int s = avalarray.sum();                   // 150

valarray<int> foo (init,5);                // 10 20 30 40 50
valarray<int> bar = foo.apply(increment); // 11 21 31 41 51

valarray<int> myvalarray (init,5);        // 10 20 30 40 50
myvalarray = myvalarray.cshift(2);       // 30 40 50 10 20
myvalarray = myvalarray.cshift(-1);      // 20 30 40 50 10
```


<valarray>: Access



```
template <typename T> class valarray {
...
    T operator[] (size_t n) const;
    T& operator[] (size_t n);
    valarray<T> operator[] (slice sub) const;
    slice_array<T> operator[] (slice sub);
    valarray<T> operator[] (const gslice& sub) const;
    gslice_array<T> operator[] (const gslice& sub);
    valarray<T> operator[] (const valarray<bool>& mask) const;
    mask_array<T> operator[] (const valarray<bool>& mask);
    valarray<T> operator[] (const valarray<size_t>& indices) const;
    indirect_array<T> operator[] (const valarray<size_t>& indices);
    ...
}
```

Access by indices, slices, generalized slices, masks, and index vectors.

<valarray>: class slice




This class represents a valarray slice selector. It does not contain any element - it only describes a selection of elements in a valarray to be used as an index in `valarray::operator[]`.

A valarray slice is specified by a starting index, a size, and a stride.

The starting index (`start`) is the index of the first element in the selection. The size (`size`) is the number of elements in the selection. The stride (`stride`) is the separation between the elements in the valarray that are selected.

Therefore, a slice with a stride higher than 1 does not select contiguous elements in the valarray; For example, `slice(3,4,5)` selects the elements 3, 8, 13 and 18.

<valarray>: class slice



```
class slice {
public:
    slice ();
    slice (size_t start, size_t length, size_t stride);
    slice (const slice& slc);
    size_t start() const;
    size_t stride() const;
    size_t end() const;
}


valarray<int> foo (10);
for (int i=0; i<10; ++i) foo[i]=i;

slice slc (2,4,1);
valarray<int> bar = foo[slc];

cout << "slice starting at " << slc.start() << ":\n";
for (size_t n=0; n<bar.size(); n++) cout << bar[n] << ' '; cout << endl;

slice starting at 2:
2 3 4 5
```

<valarray>: class gslice




This class represents a valarray generalized slice (multidimensional slice) selector specified by a starting index, a set of sizes, and a set of strides. It produces a multidimensional combination of slice selections, where:

The starting index (start) is the index of the first element in the selection. The size (size) is the number of elements selected in each dimension. The stride (stride) is the separation between the elements that are selected (the size of each dimension).

For example, a gslice with start = 1, size = {2, 3}, stride = {7, 2} selects

```
start=1:
          *
          |
size=2, stride=7: *-----*
                  |
size=3, stride=2: *-----* *-----*
                  |         |         |         |
gslice:           *         *         *         *
                  |         |         |         |
                  *         *         *         *
```

<valarray>: class gslice



```
class gslice {
public:
    gslice ();
    gslice (size_t start, size_t length, size_t stride);
    slice (const slice& slc);

    size_t start() const;
    valarray<size_t> stride() const;
    valarray<size_t> end() const;
}

valarray<int> foo (14); for (int i=0; i<14; ++i) foo[i]=i;


size_t start=1; size_t lengths[] = {2,3}; size_t strides[] = {7,2};

gslice mygslice (start, valarray<size_t>(lengths,2), valarray<size_t>(strides,2));
valarray<int> bar = foo[mygslice];

for (size_t n=0; n<bar.size(); n++) cout << bar[n] << ' '; cout << endl;

1 3 5 8 10 12
```


<valarray>: Multi-Dimensional Arrays



```
valarray<int> va(int a0, int a1) {
    valarray<int> result(2);
    result[0] = a0; result[1] = a1;
    return result;
}


valarray<int> a(24);
for (size_t i = 0; i < a.size(); ++i)
    a[i] = i;
cout << a[gslice(1, va(2, 3), va(12, 4))] << '\n';

1 5 9 13 17 21
```

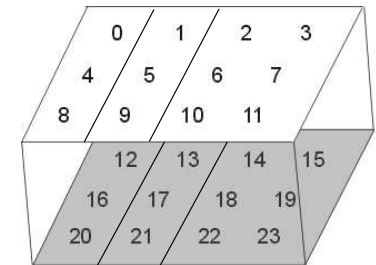

Representation of matrices by
valarray and gslice.

<valarray>: Access Example



```
valarray<int> myarray (10);           // 0 0 0 0 0 0 0 0 0 0
myarray[slice(2,3,3)]=10;           // 0 0 10 0 0 10 0 0 10 0

size_t lengths[]={2,2};
size_t strides[]={6,2};             // 0 20 10 20 0 10 0 20 10 20
myarray[gslice(1, valarray<size_t>(lengths,2),
  valarray<size_t>(strides,2))]=20;


valarray<bool> mymask (10);
for (int i=0; i<10; ++i) mymask[i]= ((i%2)==0);
myarray[mymask] += valarray<int>(3,5); // 3 20 13 20 3 10 3 20 13 20

size_t sel[]={2,5,7};
valarray<size_t> myselection (sel,3); // 3 20 99 20 3 99 3 99 13 20
myarray[myselection]=99;

for (size_t i=0; i<myarray.size(); ++i) cout << myarray[i] << ' ';

3 20 99 20 3 99 3 99 13 20
```


<valarray>: Assignment



```
template <typename T> class valarray {
...
valarray<T>& operator=(const valarray<T>& x);
valarray<T>& operator=(const T& val);
valarray<T>& operator=(const slice_array<T>& sub);
valarray<T>& operator=(const gslice_array<T>& sub);
valarray<T>& operator=(const mask_array<T>& sub);
valarray<T>& operator=(const indirect_array<T>& sub);
...
}

valarray<int> foo (4); // 0 0 0 0
valarray<int> bar (2,4); // 0 0 0 0 2 2 2 2
foo = bar; // 2 2 2 2 2 2 2 2
bar = 5; // 2 2 2 2 5 5 5 5
foo = bar[slice (1,2,1)]; // 5 5 5 5 5 5
```


<valarray>: Member Operations



```
template <typename T> class valarray {
...
valarray<T> operator+() const;
valarray<T> operator-() const;
valarray<T> operator~() const;
valarray<bool> operator!() const;

valarray<T>& operator*=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator/=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator%=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator+=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator-=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator^=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator&=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator|=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator<=(const valarray<T>& rhs); // also: const T& rhs
valarray<T>& operator>=(const valarray<T>& rhs); // also: const T& rhs
...
}
```

<valarray>: Global Operations




```
template <class T> valarray<T> operator+
(const valarray<T>& lhs, const valarray<T>& rhs);
template <class T> valarray<T> operator+
(const T& val, const valarray<T>& rhs);
template <class T> valarray<T> operator+
(const valarray<T>& lhs, const T& val);

// analogous for other operations:

// operator-, operator*, operator/, operator%
// operator^, operator&, operator|
// operator<<, operator>>
// operator&&, operator||
// operator==, operator!=, operator<, operator<=, operator>, operator>=
```

<valarray>: Arithmetic Example



```
int init[] = {10,20,30,40};

//      foo:      bar:
// -----
valarray<int> foo (init, 4); // 10 20 30 40
valarray<int> bar (25,4);   // 10 20 30 40   25 25 25 25

bar += foo;                // 10 20 30 40   35 45 55 65

foo = bar + 10;            // 45 55 65 75   35 45 55 65


foo -= 10;                 // 35 45 55 65   35 45 55 65

valarray<bool> comp = (foo==bar);

if (comp.min() == true)
    cout << "They are equal.\n";
else
    cout << "They are not equal.\n";

They are equal.
```

<valarray>: Helper Classes



```
template <class T> slice_array;
template <class T> gslice_array;
template <class T> mask_array;
template <class T> indirect_array;
```


These classes are used as intermediate types returned by the non-constant versions of valarrays's subscript operator (valarray operator[]) when used with slices, generalized slices, masks, or index vectors.

An object of such a class contains references to the elements in the valarray object that were selected, and overloads the assignment and compound assignment operators, allowing direct access to the elements in the selection when used as l-value (left-value of an assignment operation).

When used as r-value (right-value of an assignment operation), it can initialize a valarray object, since valarray has a constructor taking a an object of this class as argument.

All the constructors of this class are private, preventing direct instantiations by a program - its only purpose is to be an efficient way to access the elements selected by a slice with valarray's operator[] .

<valarray>: Example



```
valarray<int> foo (9);
slice myslice;

for (int i=0; i<9; ++i) foo[i]=i;      // 0 1 2 3 4 5 6 7 8
//      |   |   |
myslice=slice(1,3,2);                 // v   v   v
foo[myslice] *= valarray<int>(10,3);  // 0 10 2 30 4 50 6 7 8
//      |   |   |
myslice = slice (0,3,3);              // v       v       v
foo[myslice] = 99;                   // 99 10 2 99 4 50 99 7 8

cout << "foo:\n";
for (size_t n=0; n<foo.size(); n++) cout << foo[n] << ' '; cout << endl;

99 10 2 99 4 50 99 7 8
```

Typically there is need for the direct use of these classes.

1. Integers and Floating Point Numbers


2. Complex Numbers

3. Rational Numbers

4. Numerical Vectors

5. Numerical Algorithms

<numeric>: Numerical Algorithms



Generalized numeric operations


This header describes four algorithms specifically designed to operate on numeric sequences that support certain operators.

Due to their flexibility, they can also be adapted for other kinds of sequences.

```
// Accumulates (by default: adds) all the values
// in the range [first,last) to init.
template <class I, class T>
T accumulate(I first, I last, T init);
template <class I, class T, class Op>
T accumulate(I first, I last, T init, Op op);

// Assigns to every element in the range starting at result the difference
// between its corresponding elements in the range [first,last) and the
// one preceding it (except for *result which is assigned *first).
template <class I, class O>
O adjacent_difference(I first, I last, O result);
template <class I, class O, class Op>
O adjacent_difference (I first, I last, O result, Op op);
```

<numeric>: Numerical Algorithms




```
// Returns the result of accumulating init with the inner products of the
// pairs formed by the elements of two ranges starting at first1 and first2.
template <class I1, class I2, class T>
T inner_product(I1 first1, I1 last1, I2 first2, T init);
template <class I1, class I2, class T, class Op1, class Op2>
T inner_product( I1 first1, I1 last1, I2 first2, T init, Op1 op1, Op2 op2 );

// Assigns to every element in the range starting at result the partial sum
// of the corresponding elements in the range [first,last).
template <class I, class O>
O partial_sum(I first, I last, O result);
template <class I, class O, class Op>
O partial_sum(I first, I last, O result, Op op);
```

The full power of the template parameters will be explained later.

<numeric>: Examples



```
int myaccumulator (int x, int y) {return x-y;}
int myproduct (int x, int y) {return x+y;}

int init = 100;
int series1[] = {10,20,30};
int series2[] = {1,2,3};


cout << "using default inner_product: ";
cout << inner_product(series1,series1+3,series2,init);
cout << endl;

cout << "using custom functions: ";
cout << inner_product(series1,series1+3,series2,init,myaccumulator,myproduct);
cout << endl;

using default inner_product: 240
using custom functions: 34
```

The functions are directly applicable to plain arrays.

<numeric>: Examples



```
template<class T> T* valarray_begin(valarray<T>& a)
{ return &a[0]; }
template<class T> T* valarray_end(valarray<T>& a)
{ return valarray_begin(a)+a.size(); }

int init = 100;
int series1[] = {10,20,30};
int series2[] = {1,2,3};
valarray<int> s1(series1, 3);
valarray<int> s2(series2, 3);

cout << "using default inner_product: ";
cout << inner_product(valarray_begin(s1),valarray_end(s1),
                      valarray_begin(s2),init);

cout << endl;

using default inner_product: 240
```

With some provision, these functions are also applicable to valarrays.